




# STMPS2141, STMPS2151 STMPS2161, STMPS2171

## Enhanced single channel power switches

### Features

- 90 mΩ high-side MOSFET switch
- 500/1000 mA continuous current
- Thermal and short-circuit protection with overcurrent logic output
- Operating range from 2.7 V to 5.5 V
- CMOS- and TTL-compatible enable inputs
- Undervoltage lockout (UVLO)
- 12 μA maximum standby supply current
- Ambient temperature range, -40°C to 85°C
- 8 kV ESD protection
- Reverse current protection
- Fault-blanking

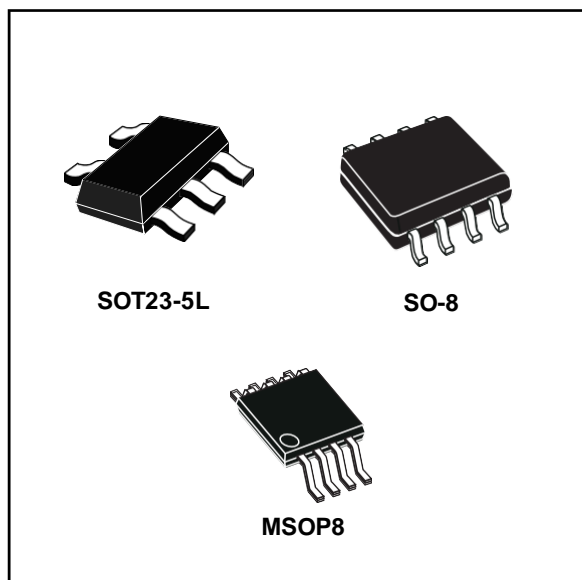

### Description

The STMPS2141, STMPS2151, STMPS2161, STMPS2171 power distribution switches are intended for applications where heavy capacitive loads and short circuits are likely to be encountered. These devices incorporate 90 mΩ N-channel MOSFET high-side power switches for power-distribution. These switches are controlled by a logic enable input.

When the output load exceeds the current-limit threshold or a short is present, the device limits the output current to a safe level by switching into a constant-current mode. When continuous heavy overloads and short circuits increase the power dissipation in the switch, causing the junction temperature to rise, a thermal protection circuit shuts the switch off to prevent damage. Recovery from a thermal shutdown is automatic once the device has cooled sufficiently. Internal circuitry ensures the switch remains off until a valid input voltage is present.

Table 1. Device summary

Order codes			Current limit (mA)	Enable
SO-8	SOT23-5L	MSOP8 <sup>(1)</sup>		
STMPS2141MTR	STMPS2141STR	STMPS2141TTR	500	Active low
STMPS2151MTR	STMPS2151STR	STMPS2151TTR	500	Active high
STMPS2161MTR	STMPS2161STR	STMPS2161TTR	1000	Active low
STMPS2171MTR	STMPS2171STR	STMPS2171TTR	1000	Active high

1. MSOP8 package is also known as "TSSOP8"

# Contents

<b>1</b>	<b>Block diagram .....</b>	<b>3</b>
<b>2</b>	<b>Pin settings .....</b>	<b>4</b>
2.1	Pin connections .....	4
2.2	Pin description .....	4
<b>3</b>	<b>Functional description .....</b>	<b>5</b>
3.1	Fault blanking .....	5
3.2	Overcurrent/over-temperature protection .....	5
3.3	FAULT conditions .....	5
3.4	Reversed current blocking .....	6
3.5	UVLO .....	6
<b>4</b>	<b>Ambient temperature.....</b>	<b>7</b>
<b>5</b>	<b>Maximum rating .....</b>	<b>8</b>
5.1	Absolute maximum rating .....	8
5.2	Recommended operating conditions.....	8
<b>6</b>	<b>Electrical specification.....</b>	<b>9</b>
<b>7</b>	<b>Detail device characteristics .....</b>	<b>12</b>
7.1	Additional electrical charts .....	12
	STMPS2141, STMPS2151 .....	12
	V <sub>OUT</sub> = 5.0 V .....	12
	STMPS2161, STMPS2171 .....	17
	V <sub>OUT</sub> = 5.0 V.....	17
<b>8</b>	<b>Package mechanical data.....</b>	<b>22</b>
<b>9</b>	<b>Revision history.....</b>	<b>26</b>

## List of figures

Figure 1.	Block diagram.....	5
Figure 2.	SOT23-5L, SO-8 and MSOP8 pin connections.....	6
Figure 3.	Voltage output turn on delay time.....	14
Figure 4.	Voltage output turn off delay time.....	14
Figure 5.	Current output turn on delay time.....	14
Figure 6.	Current output turn off delay time.....	14
Figure 7.	Voltage output turn on delay time.....	14
Figure 8.	Voltage output turn off delay time.....	14
Figure 9.	Current output turn on delay time.....	15
Figure 10.	Current output turn off delay time.....	15
Figure 11.	UVLO rising.....	15
Figure 12.	UVLO falling.....	15
Figure 13.	OC protection at $V_{OUT} = 3.0\text{ V}$ .....	16
Figure 14.	OC protection at $V_{OUT} = 3.0\text{ V}$ .....	16
Figure 15.	OC protection at $V_{OUT} = 5.0\text{ V}$ .....	16
Figure 16.	OC protection at $V_{OUT} = 5.0\text{ V}$ .....	16
Figure 17.	$I_{CC}$ vs $V_{IN}$ (enabled).....	16
Figure 18.	$I_{CC}$ vs temperature (enabled).....	16
Figure 19.	$I_{CC}$ vs $V_{IN}$ (disabled).....	17
Figure 20.	$I_{CC}$ vs temperature (disabled).....	17
Figure 21.	RDS ON vs $V_{IN}$ .....	17
Figure 22.	RDS ON vs temperature.....	17
Figure 23.	ILIMIT vs temperature.....	17
Figure 24.	Switch leakage vs temperature.....	17
Figure 25.	Output rise time vs. $V_{IN}$ .....	18
Figure 26.	Output fall time vs. $V_{IN}$ .....	18
Figure 27.	UVLO vs temperature.....	18
Figure 28.	Voltage output turn on delay time.....	19
Figure 29.	Voltage output turn off delay time.....	19
Figure 30.	Current output turn on delay time.....	19
Figure 31.	Current output turn off delay time.....	19
Figure 32.	Voltage output turn on delay time.....	20
Figure 33.	Voltage output turn off delay time.....	20
Figure 34.	Current output turn on delay time.....	20
Figure 35.	Current output turn off delay time.....	20
Figure 36.	UVLO rising.....	20
Figure 37.	UVLO falling.....	20
Figure 38.	OC protection at $V_{OUT} = 3.0\text{ V}$ .....	21
Figure 39.	OC protection at $V_{OUT} = 3.0\text{ V}$ .....	21
Figure 40.	OC protection at $V_{OUT} = 5.0\text{ V}$ .....	21
Figure 41.	OC protection at $V_{OUT} = 5.0\text{ V}$ .....	21
Figure 42.	ICC vs $V_{IN}$ (enabled).....	22
Figure 43.	ICC vs temperature (enabled).....	22
Figure 44.	ICC vs $V_{IN}$ (disabled).....	22
Figure 45.	ICC vs temperature (disabled).....	22
Figure 46.	RDS ON vs $V_{IN}$ .....	22
Figure 47.	RDS ON vs temperature.....	22
Figure 48.	ILIMIT vs temperature.....	23

---


Figure 49.	Switch leakage vs temperature .....	23
Figure 50.	Output rise time vs. VIN.....	23
Figure 51.	Output fall time vs. VIN.....	23
Figure 52.	UVLO vs temperature.....	23
Figure 53.	SOT23-5L package outline .....	24
Figure 54.	SOT23-5L footprint recommendation .....	25
Figure 55.	SO-8 package outline.....	26
Figure 56.	MSOP8 package outline.....	27

## List of tables

Table 1.	Device summary .....	1
Table 2.	Pin description .....	7
Table 3.	FAULT conditions .....	8
Table 4.	SOT23-5L (160 °C/W) .....	10
Table 5.	MSOP8 (220 °C/W).....	10
Table 6.	SO-8 (160 °C/W).....	10
Table 7.	Absolute maximum ratings.....	11
Table 8.	Recommended operating conditions.....	11
Table 9.	SOT-23-5L electrical characteristics.....	12
Table 10.	MSO8/SO8 electrical characteristics .....	12
Table 11.	Current limit characteristics ( $V_I = 5.5\text{ V}$ , $I_O = \text{rated current}$ , $T_J = 25\text{ °C}$ , unless otherwise specified) .....	13
Table 12.	Supply current characteristics ( $V_I = 5.5\text{ V}$ , $I_O = \text{rated current}$ , $T_J = 25\text{ °C}$ , unless otherwise specified) .....	13
Table 13.	Thermal characteristics ( $V_I = 5.5\text{ V}$ , $I_O = \text{rated current}$ , $T_J = 25\text{ °C}$ , unless otherwise specified) .....	14
Table 14.	UVLO characteristics ( $V_I = 5.5\text{ V}$ , $I_O = \text{rated current}$ , $T_J = 25\text{ °C}$ , unless otherwise specified) .....	14
Table 15.	OC pin characteristics ( $V_I = 5.5\text{ V}$ , $I_O = \text{rated current}$ , $T_J = 25\text{ °C}$ , unless otherwise specified) .....	14
Table 16.	EN pin characteristics ( $V_I = 5.5\text{ V}$ , $I_O = \text{rated current}$ , $T_J = 25\text{ °C}$ , unless otherwise specified) .....	14
Table 17.	SOT23-5L mechanical data.....	25
Table 18.	SOT23-5L footprint dimensions.....	26
Table 19.	SO-8 mechanical data.....	27
Table 20.	MSOP8 package mechanical data.....	28
Table 21.	Document revision history .....	29

# 1 Block diagram

Figure 1. Block diagram

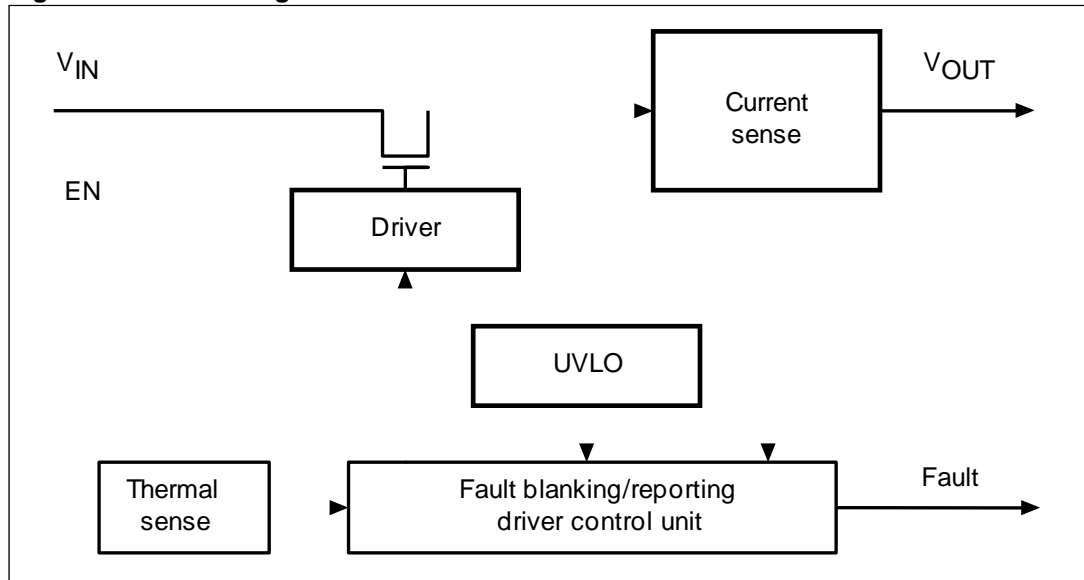

以上内容仅为本文档的试下载部分，为可阅读页数的一半内容。如要下载或阅读全文，请访问：<https://d.book118.com/047103141040006056>