



S1931a, S2031/S2031a,
S2231/S2231a, S2331/ S2331a , S2321a,
LCD Monitors
User Guide

© 2010 Hewlett-Packard Development Company, L.P.

Microsoft, Windows, and Windows Vista are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. This document contains proprietary information that is protected by copyright. No part of this document may be photocopied, reproduced, or translated to another language without the prior written consent of Hewlett-Packard Company.

Second Edition (March 2010)

Document Part Number: 603307-002

Important Safety Instructions

1. Please read all the following instructions carefully and keep this manual for future reference.
2. Unplug this monitor before cleaning. Do not use liquids or aerosol cleaners to clean the surface of the LCD. Use a damp cloth for cleaning.
3. Do not push the surface of the LCD screen with your hands or any hard article. It may cause damage to the circuit or liquid crystal molecules inside the monitor.
4. Do not expose the equipment to water, rain or moisture.
5. Do not place the product on any unstable cart, stand or table, shelves etc. It may fall, causing serious damage to itself.
6. Do not block or cover the openings for ventilation with any clothing or sheath. Do not place the equipment near a radiator or electrical heater or within a closed space, such as a bookcase, without proper ventilation.
7. Do not place anything on the power cord. Do not locate the power cord where it will be abused by persons walking on it.
8. Never insert any object into this monitor through cabinet slots as it may touch dangerous high-voltage points or cause short circuit, resulting in fire or electric shock. Never spill liquid of any kind on the monitor.
9. Follow the suggested resolution of the monitor to decide the resolution setting in the computer to enable optimum display.
10. Avoid displaying the same image on the screen of the monitor for a long time. Otherwise, it may cause aging liquid crystal molecules inside the monitor and poor display.
11. Unplug the monitor to prolong its life cycle when it has been unused for a long time.
12. Do not attempt to service this monitor yourself since opening or removing the covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service engineer.
13. Unplug the monitor and take it to the manufacturer's service personnel under the following circumstances:
 - a. When the power cord or plug is damaged or frayed.
 - b. If liquid has been spilled into the monitor.
 - c. If the monitor has been exposed to rain or water.
 - d. If the monitor has been dropped or the cabinet has been damaged.
 - e. When the monitor exhibits a distinct change in performance and servicing is needed.

Chapter I. Introduction

1.1 Features

- ☒ Multilingual OSD adjustment
- ☒ Compatible with IBM VGA, extended VGA, VESA VGA, SVGA, XGA, and SXGA modes
- ☒ Wide range of applicable voltages (AC 100-240V 50/60Hz) enables direct use without any setting.
- ☒ Plug-and-play VESA DDC1/ 2B Standard. Compatible with Windows 9x / 2000 / xp / Vista operation systems

1.2 Check list

Please make sure the following items are included with your LCD monitor;

- ☒ The monitor (and the pedestal)
- ☒ Lower stand
- ☒ Power cord
- ☒ Signal cord
- ☒ User manual
- ☒ Fast installation manual
- ☒ Warranty certificate
- ☒ Audio cable (select models)
- ☒ DVI Cable (select models)


If any of these items are missing, please contact your dealer for technical support and custom service.

Note: Be sure to save original box and all packing materials for future transport.


Chapter II. Installation

2.1 Install the pedestal

Please follow the steps illustrated below to install the pedestal.

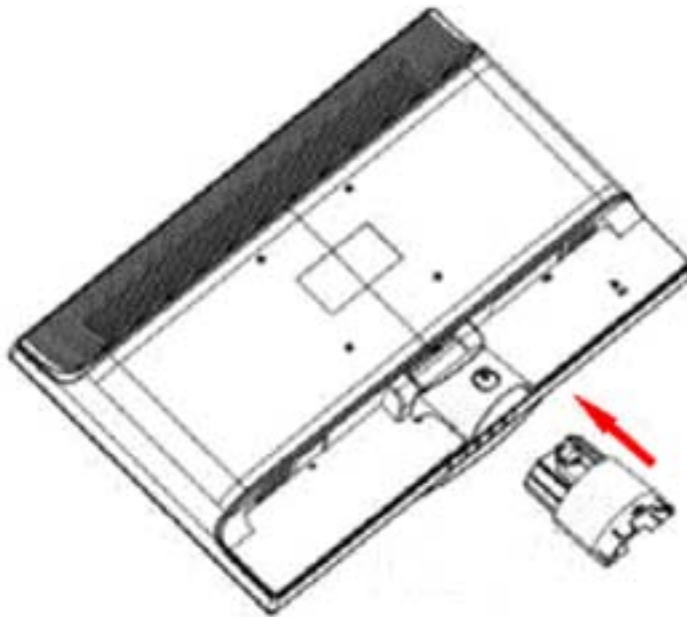

Step 1

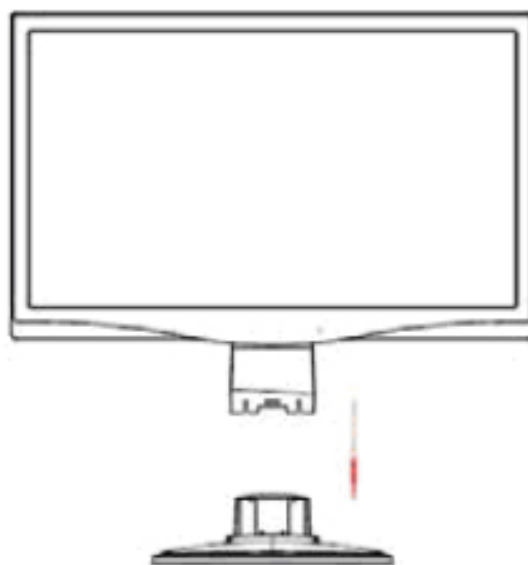


Step 2

2.2 Connect your monitor to your computer

1. Power off and unplug your computer.
2. Connect the 15-Pin or 24-Pin ends of the signal cable to the VGA or DVI port of your monitor and the VGA or DVI OUT jack on the back of your computer. Secure the screws on both ends of the signal cable.
3. Connect the power cords of your computer and monitor to the nearest electrical outlet.
4. Power on your computer and monitor. If your monitor displays an image, the installation has been successfully done. If the monitor does not display any image, check all the connections.

Cautions:

1. For installation, please complete signal cord connection before plugging the power cord into the electrical outlet to avoid damaging the monitor.
2. During installation, please support the front frame with your hand at its center of gravity to avoid dropping and damaging the monitor.

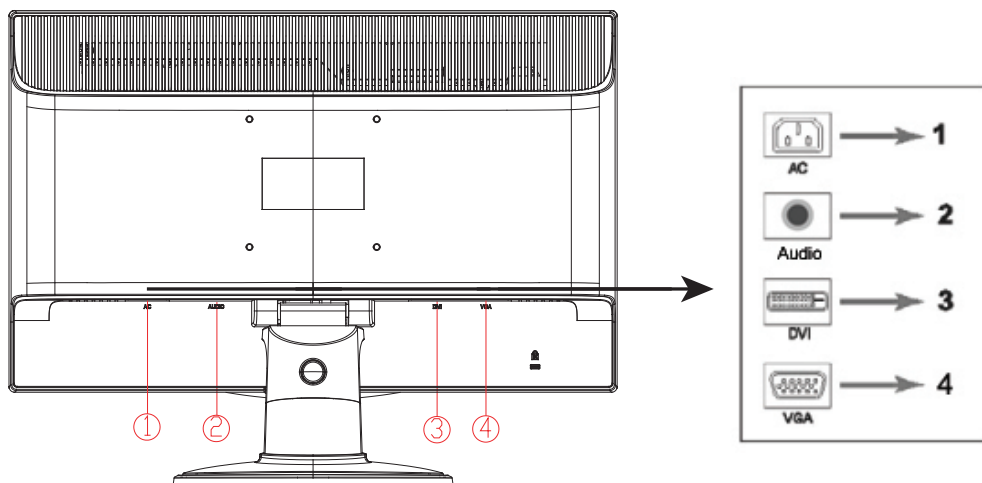

Overview of the ports of the monitor:

1. AC power supply input
2. Audio signal input (select models)
3. DVI signal input
4. VGA signal input

Connecting the Audio Cable (Select Models)

Connect the built-in monitor speakers to the computer and to the audio connector on the rear of the monitor by using the audio cable (provided with select models).

以上内容仅为本文档的试下载部分，为可阅读页数的一半内容。如要下载或阅读全文，请访问：<https://d.book118.com/186103204243010210>