GH™ 130, GH 200, GH230, GH 300 Hydraulic Sprayers
GH™ 130，GH 200，GH230，GH 300 油圧式スプレー装置
GH™ 130，GH 200，GH230，GH 300 液压喷涂机
GH™ 130，GH 200，GH230，GH 300 수압식 분무기

311796D
EN JA ZH KO

- Use with Architectural Coatings and Paints -
- 建築コーティングと塗装への利用 -
- 适用于建筑涂层和涂料 -
- 구조적 코팅 및 페인트용 -

List of models provided on page 2. / 型式のリストは 2 ページに記載。/ 型号清单见第 2 页。/ 2 페이지의 모델 목록 .

3300 psi (22.8 MPa, 228 bar) Maximum Working Pressure / 3300 psi（22.8 Mpa、228 バール）最大使用圧力 / 3300 psi（22.8 MPa，228 bar）最大工作压力 / 3300 psi（22.8 MPa，228 bar）최대 작동 압력

Important Safety Instructions
Read all warnings and instructions in this manual. Save these instructions.

重要な安全情報
本取扱説明書のすべての警告および説明をお読み下さい。説明書は保管しておくようにして下さい。

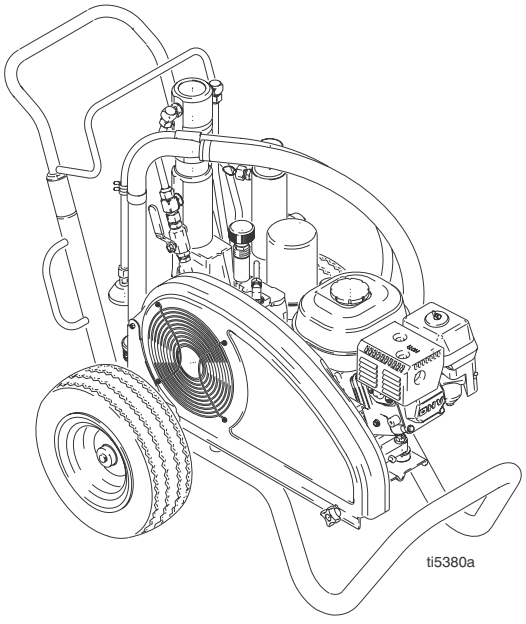
重要安全说明
请阅读本手册的所有警告及说明。妥善保存这些说明。

중요 안전 정보
이 설명서의 모든 경고와 지침을 읽고，이러한 지침을 보관해 두십시오 .

311797




311845

311861 - Contractor Gun
311254 - Silver Gun



PROVEN QUALITY. LEADING TECHNOLOGY.

Models / 型番 / 型号 / 모델

	 GH130	 GH200	 GH230	 GH300	 120 Vac 60 Hz	 ETL/CSA/UL 120 Vac 60 Hz	
253957	✔						✔
253959	✔				✔		✔
253980	✔					✔	✔
253962		✔					✔
253963		✔			✔		✔
253981		✔				✔	✔
255095		✔					✔
253965			✔				✔
253966			✔		✔		✔
253982			✔			✔	✔
253968				✔			✔

Electric Motor Kit Options

Kit Number	Sprayer Model	Description
288474	GH130	120VAC, 60Hz, 20A, CAS/UL approved
288473	GH130	120VAC, 60Hz, 15A
248950	GH200/GH230	120VAC, 60Hz, 20A, CSA/UL approved
248949	GH200/GH230	120 VAC, 60Hz, 15A
248946	EH200/HD1200	240VAC, 50Hz, 13.4A

Warning

The following warnings are for the setup, use, grounding, maintenance, and repair of this equipment. The exclamation point symbol alerts you to a general warning and the hazard symbol refers to procedure-specific risk. Refer back to these warnings. Additional, product-specific warnings may be found throughout the body of this manual where applicable.

⚠ WARNING



FIRE AND EXPLOSION HAZARD

Flammable fumes, such as solvent and paint fumes, in **work area** can ignite or explode. To help prevent fire and explosion:

- Use equipment only in well ventilated area.
- Eliminate all ignition sources; such as pilot lights, cigarettes, portable electric lamps, and plastic drop cloths (potential static arc).
- Keep work area free of debris, including solvent, rags and gasoline.
- Do not plug or unplug power cords, or turn power or light switches on or off when flammable fumes are present.
- Ground all equipment in the work area. See **Grounding** instructions.
- Use only grounded hoses.
- Hold gun firmly to side of grounded pail when triggering into pail.
- If there is static sparking or you feel a shock, **stop operation immediately.** Do not use equipment until you identify and correct the problem.
- Keep a working fire extinguisher in the work area.



SKIN INJECTION HAZARD

High-pressure fluid from gun, hose leaks, or ruptured components will pierce skin. This may look like just a cut, but it is a serious injury that can result in amputation. **Get immediate surgical treatment.**

- Do not point gun at anyone or at any part of the body.
- Do not put your hand over the spray tip.
- Do not stop or deflect leaks with your hand, body, glove, or rag.
- Do not spray without tip guard and trigger guard installed.
- Engage trigger lock when not spraying.
- Follow **Pressure Relief Procedure** in this manual, when you stop spraying and before cleaning, checking, or servicing equipment.



PRESSURIZED EQUIPMENT HAZARD

Fluid from the gun/dispense valve, leaks, or ruptured components can splash in the eyes or on skin and cause serious injury.

- Follow **Pressure Relief Procedure** in this manual, when you stop spraying and before cleaning, checking, or servicing equipment.
- Tighten all fluid connections before operating the equipment.
- Check hoses, tubes, and couplings daily. Replace worn or damaged parts immediately.



ELECTRIC SHOCK HAZARD

Improper grounding, setup, or usage of the system can cause electric shock.

- Turn off and disconnect power cord before servicing equipment.
- Use only grounded electrical outlets.
- Use only 3-wire extension cords.
- Ensure ground prongs are intact on sprayer and extension cords.
- Do not expose to rain. Store indoors.

⚠ WARNING



MOVING PARTS HAZARD

Moving parts can pinch or amputate fingers and other body parts.

- Keep clear of moving parts.
- Do not operate equipment with protective guards or covers removed.
- Pressurized equipment can start without warning. Before checking, moving, or servicing equipment, follow the **Pressure Relief Procedure** in this manual. Disconnect power or air supply.



EQUIPMENT MISUSE HAZARD

Misuse can cause death or serious injury.

- Do not exceed the maximum working pressure or temperature rating of the lowest rated system component. See **Technical Data** in all equipment manuals.
- Use fluids and solvents that are compatible with equipment wetted parts. See **Technical Data** in all equipment manuals. Read fluid and solvent manufacturer's warnings.
- Check equipment daily. Repair or replace worn or damaged parts immediately.
- Do not alter or modify equipment.
- For professional use only.
- Use equipment only for its intended purpose. Call your Graco distributor for information.
- Route hoses and cables away from traffic areas, sharp edges, moving parts, and hot surfaces.
- Do not use hoses to pull equipment.
- Comply with all applicable safety regulations.



PRESSURIZED ALUMINUM PARTS HAZARD

Do not use 1,1,1-trichloroethane, methylene chloride, other halogenated hydrocarbon solvents or fluids containing such solvents in pressurized aluminum equipment. Such use can cause serious chemical reaction and equipment rupture, and result in death, serious injury, and property damage.



SUCTION HAZARD

Never place hands near the pump fluid inlet when pump is operating or pressurized. Powerful suction could cause serious injury.



CARBON MONOXIDE HAZARD

Exhaust contains poisonous carbon monoxide, which is colorless and odorless. Breathing carbon monoxide can cause death. Do not operate in an enclosed area.



TOXIC FLUID OR FUMES HAZARD

Toxic fluids or fumes can cause serious injury or death if splashed in the eyes or on skin, inhaled, or swallowed.

- Read MSDS's to know the specific hazards of the fluids you are using.
- Store hazardous fluid in approved containers, and dispose of it according to applicable guidelines.



BURN HAZARD

Equipment surfaces and fluid that's heated can become very hot during operation. To avoid severe burns, do not touch hot fluid or equipment. Wait until equipment/fluid has cooled completely.



PERSONAL PROTECTIVE EQUIPMENT

You must wear appropriate protective equipment when operating, servicing, or when in the operating area of the equipment to help protect you from serious injury, including eye injury, inhalation of toxic fumes, burns, and hearing loss. This equipment includes but is not limited to:

- Protective eyewear
- Clothing and respirator as recommended by the fluid and solvent manufacturer
- Gloves
- Hearing protection

警告

以下の警告は本機器の据え付け、使用、接地、維持、修理についてです。感嘆符のシンボルは一般的な警告を、危険シンボルは手順自体の危険性を知らせます。これらの警告を参照してください。加えて、当てはまる場合は製品独自の警告が本取扱説明書にあります。

⚠ 警告



火災、爆発の危険

溶剤または **作業場所** 中で気化した塗料のような可燃性ガスは、引火または爆発の恐れがあります。火災および爆発を避けるには：

- 十分換気された場所でのみ使用するようにして下さい。
- パイロット灯やタバコの火、携帯電灯およびプラスチック製たれよけ布などのすべての着火源（静電アークが発生する恐れのあるもの）は取り除いてください。
- 溶剤、雑巾およびガソリンなど、必要ない物を作業場所に置かないようにして下さい。
- 引火性の気体が充満している場所で、プラグの抜き差しや電気のスイッチの ON/OFF はしないで下さい。
- 作業場所にあるすべての装置を接地して下さい。**「接地** 作業について」をご参照ください。
- 接地済みホースのみを使用するようにして下さい。
- 容器中に発射する場合、噴霧器を容器の接地側に向けてしっかりと持ってください。
- 静電スパークが発生したか、またはショックを感じた場合は、**直ちに運転を中止して下さい。**原因を特定し、それが除去されるまで装置を使用しないで下さい。
- 作業場所に作動する消火器を備え置くようにして下さい。



高圧噴射よる危険

ガン、ホースの漏れ部分または部品の破裂部分から噴出する高圧の液体は皮膚を貫通します。ただの切り傷のように見えても、切断に至る重大な怪我につながることがあります。**すぐに医師の手当てを受けて下さい。**

- ガンを人や体の一部に向けないで下さい。
- スプレーチップに手や指を近づけないで下さい。
- 液漏れを手、体、手袋または雑巾等で止めたり、防いだりしないで下さい。
- チップガードおよびトリガガードが付いていない状態で絶対にスプレーしないでください。
- スプレーを行なわない時は、引き金をロックして下さい。
- スプレー作業を中止する場合、または装置を清掃、点検、修理する前には、本取扱説明書の **圧力開放手順** に従って下さい。



加圧された装置の危険

ガン / ディスペンスバルブ、洩れのある箇所、または破裂した部品から出た液が目または皮膚に飛び散った場合重大な怪我が発生する可能性があります。

- スプレー作業を中止する場合、または装置を清掃、点検、修理する前には、本取扱説明書の **圧力開放手順** に従って下さい。
- 装置を運転する前に、すべての液体の流れる接続部分を締めて下さい。
- ホース、チューブおよび継手を毎日点検して下さい。磨耗または損傷した部品は直ちに交換して下さい。



電気ショックによる危険

不適切な接地、取り付けまたはシステムの使用により感電する可能性があります。

- 装置の修理を開始する前にメインスイッチの電源を OFF にし、電源コードを抜きます。
- 接地されたコンセントのみを使用するようにして下さい。
- 3 線延長コードのみを使用するようにして下さい。
- 接地先端部がスプレー装置および拡張コードにそのままの状態で接続されていることを確認して下さい。
- 雨に晒さないで下さい。室内に保管するよにして下さい。

以上内容仅为本文档的试下载部分，为可阅读页数的一半内容。如要下载或阅读全文，请访问：https://d.book118.com/585002043232011312