目 录 CONTENTS

概述、用途 …… 01
Outline, Purpose

性能、型号 …… 01
Performance, Model

型号意义 …… 02
Model meaning

结构特征 …… 02
Structural features

XBD-SLW 型泵结构图 …… 03
The configuration of XBD-SLW type pump

XBD-SLW 型泵型谱图 …… 04
XBD-SLW type pump atlas of style

XBD-SLW 型泵性能参数表 …… 05
XBD-SLW type pump performance table

XBD-SLW 型泵安装尺寸图、表 …… 10
XBD-SLW type pump dimension figure and table

XBD-SLW 型泵安装基础图、表 …… 14
XBD-SLW type pump installation basic figure and table

泵的安装说明 …… 16
Erection of the pump

泵的起动与停车 …… 16
Start and stop of the pump

泵的维护与保养 …… 17
Maintenance of the pump

故障原因及排除方法 …… 18
Failures causes and troubleshooting

管路损耗参考表 …… 20
Reference table for pipeline loss

概 述 OUTLINE

XBD系列单级单吸卧式固定式消防泵组(泵)是本公司根据国内工矿企业、工程建设、高层大厦消防之需，严格按照国际标准ISO2858和最新国标GB6245-1998“消防泵性能要求和试验方法”设计制造开拓的新颖产品。

产品经国家消防装备质量监督检测中心封样检测质量性能全面符合GB6245-1998 国标要求，产品性能达到国内同类型产品先进水平。

XBD series single-stage single-suction horizontal fixed- type fire-fighting pump unit (pump) is a brand-new product designed and produced by this Co. upon the demand of ind- ustrial and mineral enterprises, engineering construction and high buildings for fire-fighting and strictly according to the international standard ISO2858 and the latest national standard GB6245-1998, "Performance requirements and testing methods of fire-fighting pumps".

The product is approved, with its sealed sample tested by the national fire-fighting equipment quality supervising & testing centre, fully conforming the requirements in GB6245- 1998 and its performance reaches the advanced level of the same domestic ones.

用 途 PURPOSE

XBD系列泵可供输送80℃以下不含固体颗粒或物理化学性质类似清水的液体，以及轻腐蚀液体之用。

该系列泵主要用于工业及民用建筑固定消防系统(消火栓灭火系统，自动喷水灭火系统和水喷雾灭火系统等)的给水。

XBD系列泵性能参数在满足消防工况的前担下，兼顾生活(生产)给水的工况要求，该产品既可用于独立消防给水系统，又可用于消防、生活（生产）共用给水系统，还可用于建筑、市政、工矿给排水以及锅炉给水等场合。

Suitable to transport the liquid below 80℃, containing no solid grains or both physical and chemical natures of which are similar to those of pure water and the slightly corrosive liquid.

This series pump is mainly used for the water supply for the fixed fire-fighting system in both industrial and civil buildings (fire hydrant extinguishing system, auto-sp raying extinguishing system, water-fog spraying extingui- shing system etc.).

The performance parameters of this series pump can also be compatible with the requirements of the working conditions for the living (production) water supply in the meantime meeting with the fire-fighting working conditi- ons and it can be used individually for the fire-fighting water supply system, also for the mutual water supply s- ystem of fire-fighting and living (production), as well as the water supply and drainage system of buildings, mun- icipal works , factories and mines and a boiler s water supply.

性能、型号 PERFORMANCE, MODEL

泵性能范围：

额定流量：Qn=5L/s~200L/s(18m^3/h~720m^3/h)

额定压力：Pn=0.3MPa~1.5MPa (扬程：30m~150m)

转　　速：n=1450r/min ；2900r/min

泵进口压力：Po≤0.3MPa

泵最大工作压力：Po≤1.6MPa

泵进、出口口径：50~350mm

Range of performance:

Rated flow： Qn=5L/s~200L/s(18m^3/h~720m^3/h)

Rated pressure： Pn=0.3MPa~1.5MPa
(Head：30m~150m)

Rotary speed：n=1450r/min 2900r/min

Inlet pressure：Po ≤0.3MPa

Max. working pressure：Po ≤1.6MPa

Inlet and outlet apertures：50~350mm

型号意义 MODEL MEANING

XB D 3.2 / 25 SLW 100

- 泵的口径 Aperture
- 单级单吸卧式泵 Single-stage single-suction horizontal pump
- 泵的额定流量(L/s) Rated flow
- 泵的额定压力(MPa)的10倍 10 times that of rated pressure
- 原动机为电动机 Motor as the prime mover
- 消防泵代号 Code of fire-fighting pump

结构特征 STRUCTURAL FEATURES

泵为单级单吸离心泵、安装形式为卧式。

可根据现场使用条件、多方式安装。并依据流量、扬程要求采用并、串联方式增加所需流量、扬程。

轴承采用低噪音封闭轴承，出厂时已注入润滑脂，可保证连续运行两年以上。且组件同心度高，泵叶轮具有极好的动平衡，运行无振动，改善了使用环境。

泵轴封为机械密封，解决了常规离心泵填料的严重渗漏，增加了使用寿命，确保运行场地干净整洁。

泵的材料

a. 泵轴—不锈钢

b. 叶轮—铸铜

c. 承压零件—铸铁HT250或QT400-18

泵转动时，可能产生磨擦的零件均采用耐磨，耐腐蚀及高抗咬合的材料组合以确保运行可靠，降低噪声，同时避免产生锈水，堵塞喷淋等消防器件，大大延长了使用寿命和避免了停机后生锈咬死现象。

The pump is a single-stage single-suction centrifugal pump, horizontally mounted.

It can be mounted with multiple ways upon the con- ditions of use on the spot and can be in series or in par- allel according to the flow or head requirement to get the desired flow or head.

lt uses a low-noise sealed bearing, which is injected with grease when ex-works and can run in successive two years, its unit has a high concentricity and impeller has a very good dynamic balance and no vibration during runn- ing, improving the environment of use.

lts shaft seal is a mechanical one,settling the serious leak of the stuffing of common centrifugal pumps, enlar-

ging the duration and making sure of a clean and neat spot.

Materials of the pump

a.Pump shaft-stainless steel


b.lmpeller-cast copper

c.under-pressure parts-cast iron Ht250 or QT400-18 Those parts which may produce friction when the p-

ump is rotating are made of the combined material of w-earable, anti-corrosive and high joining-up oness so as to ensure a reliable running, a lowered noise and avoid rust

-water forming to prevent the spraying fire-fighting parts from being blocked , greatly extending the duration and getting rid of the phenomenon to be gripped by rusting and no way to be used again after stop.


XBD–SLW型泵结构图 THE CONSTRUCTION OF XBD-SLW TYPE PUMP

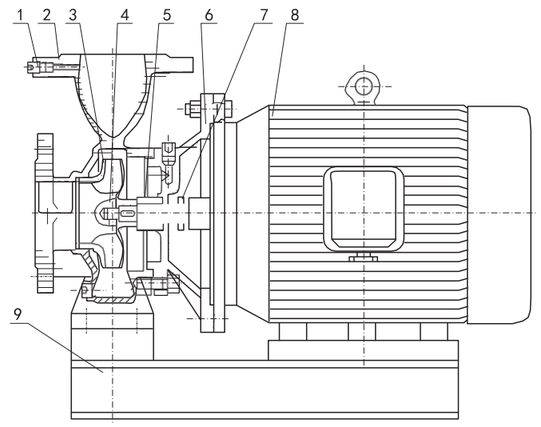


序号 No.	名称 Name	数量 Quantity
1	螺　塞 Plug	4
2	泵　体 Pump casing	1
3	叶　轮 Impeller	1
4	叶轮螺母 Impeller nut	1
5	机械密封 Mechanical seal	1
6	泵　盖 Pump cover	1
7	挡水圈 Water-bloching ring	1
8	电　机 Motor	1
9	底　座 Fundation	1

结构见图。该泵由泵、电机和底座三部分组成。泵结构包括泵体、叶轮、泵盖、机械密封等零部件组成。泵为单级单吸卧式离心泵，泵体和泵盖两部分是从叶轮背面处剖分的，即为后开门结构形式。大多数泵的叶轮前、后均设有密封环，并在叶轮后盖板上设有平衡孔，以平衡作用在转子上的轴向力。泵和电机同轴，电机采用角接触球轴承结构承受泵的残余向力。泵与电机直联，安装时无需校正，具有共同底座，并用减振垫进行隔振。安装方式其出口可以垂直向上，也可以向左或向右，安装灵活、简便。形式见下图。


See the figure for the structure. This pump consists of pump, motor and foundation three parts and its structure is formed by pump casing, impeller, pump cover, mechanical seal etc. components. It is a single-stage single-suction horizontal- type centrifugal pump and both pump casing and cover are separated from the back side of the impeller, that is the back- door structural form. For most of the pumps, a seal ring is set in both front and back of the impeller and a balance hole is set on the back cover of the impeller and a balance action on the axial force of the rotor. Both pump and motor are coaxial and a dual-angle contacting-ball bearing structure useed on the projected end of the motor`s shaft can partially balance the residual axial force of the pump. With the staright joint between pump and motor, it is not necessary to calibrate when being mounted. Both of them have a common foundation and a buffer dashpot of model JSD is used to isolate vibration. The outlet of the pump can be mounted vertically upward, leftward or rightward, flexibly and easily.



出口水平向左(从进口端看)
Outlet to leftward (from inlet)





出口水平向上(从进口端看)
Outlet to upward (from inlet)



出口水平向右(从进口端看)
Outlet to rightward (from inlet)

XBD–SLW型泵型谱图 XBD-SLW TYPE PUMP ATLAS OF STYLE

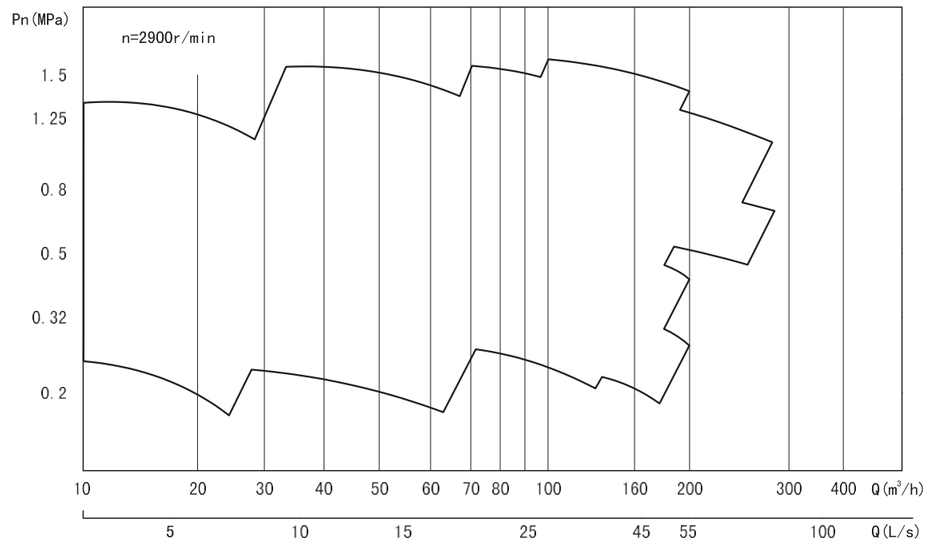

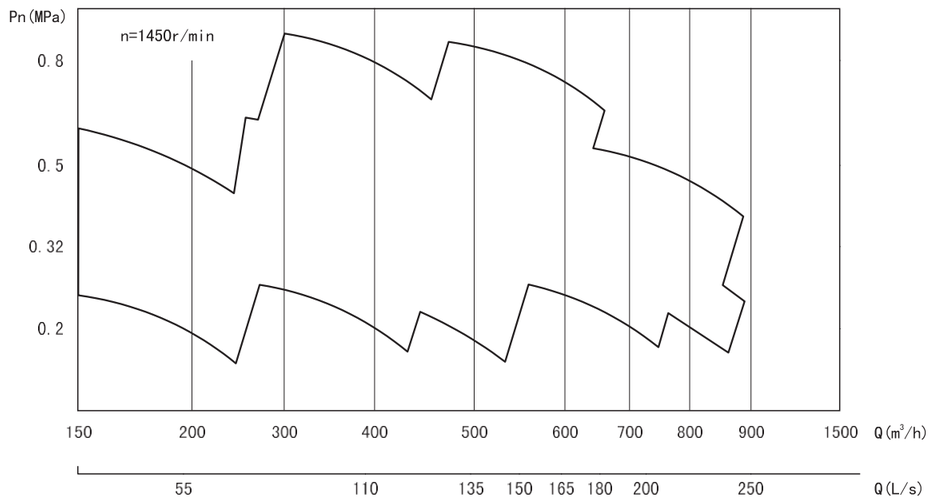

XBD–SLW型泵性能参数表 XBD-SLW TYPE PUMP PERFORMANCE TABLE

型号 Model	流量 Capacity (m^3/h)	流量 Capacity (L/s)	压力 Pressure (MPa)	效率 Eff. (%)	电机功率 Power (kW)	转速 Speed (r/min)	必需汽蚀余量 (NPSH)r (m)
3.5/5-50	3.5 5.0 5.75	13.5 18.0 20.7	0.38 0.35 0.32	57 62 66	4	2900	2.5
3/5-50	3.5 5.0 5.75	13.5 18.0 20.7	0.33 0.30 0.27	55 60 54	4	2900	2.5
5/5-50	3.5 5.0 5.75	13.5 18.0 20.7	0.54 0.50 0.45	52 56 51	7.5	2900	2.5
4.5/5-50	3.5 5.0 5.75	13.5 18.0 20.7	0.48 0.45 0.41	50 54 49	7.5	2900	2.5
4/5-50	3.5 5.0 5.75	13.5 18.0 20.7	0.43 0.40 0.36	48 52 47	5.5	2900	2.5
8/5-50	3.5 5.0 5.75	13.5 18.0 20.7	0.86 0.80 0.74	46 50 45	11	2900	2.5
7/5-50	3.5 5.0 5.75	13.5 18.0 20.7	0.75 0.70 0.63	43 47 42	11	2900	2.5
6/5-50	3.5 5.0 5.75	13.5 18.0 20.7	0.63 0.60 0.54	42 46 40	11	2900	2.5
12.5/5-50	3.5 5.0 5.75	13.5 18.0 20.7	1.35 1.25 1.13	38.5 42 38	22	2900	2.5
11.5/5-50	3.5 5.0 5.75	13.5 18.0 20.7	1.24 1.15 1.04	36 40 35	18.5	2900	2.5
10/5-50	3.5 5.0 5.75	13.5 18.0 20.7	1.08 1.00 0.92	35 38 34	18.5	2900	2.5
3.5/5-65	3.5 5.0 5.75	13.5 18.0 20.7	0.38 0.35 0.32	56 60 55	4	2900	2.5
3/5-65	3.5 5.0 5.75	13.5 18.0 20.7	0.33 0.30 0.27	56 60 55	4	2900	2.5
5.5/5-65	3.5 5.0 5.75	13.5 18.0 20.7	0.58 0.55 0.51	53 56 52	7.5	2900	2.5
4.5/5-65	3.5 5.0 5.75	13.5 18.0 20.7	0.48 0.45 0.41	53 56 52	5.5	2900	2.5

型号 Model	流量 Capacity (m^3/h)	流量 Capacity (L/s)	压力 Pressure (MPa)	效率 Eff. (%)	电机功率 Power (kW)	转速 Speed (r/min)	必需汽蚀余量 (NPSH)r (m)
4/5-65	3.5 5.0 5.75	13.5 18.0 20.7	0.43 0.40 0.37	50 54 49	5.5	2900	2.5
8.5/5-65	3.5 5.0 5.75	13.5 18.0 20.7	0.92 0.85 0.78	48 52 47	15	2900	2.5
7.5/5-65	3.5 5.0 5.75	13.5 18.0 20.7	0.80 0.75 0.67	46 50 45	11	2900	2.5
6.5/5-65	3.5 5.0 5.75	13.5 18.0 20.7	0.70 0.65 0.60	46 50 45	11	2900	2.5
13.5/5-65	3.5 5.0 5.75	13.5 18.0 20.7	1.45 1.35 1.20	40.5 44 40	22	2900	2.5
12/5-65	3.5 5.0 5.75	13.5 18.0 20.7	1.30 1.20 1.10	38.5 42 38	22	2900	2.5
10/5-65	3.5 5.0 5.75	13.5 18.0 20.7	1.08 1.00 0.92	37 40 36	18.5	2900	2.5
3.5/10-65	7.0 10.0 11.5	25.2 36.0 41.4	0.38 0.35 0.32	64 68 63	7.5	2900	3
3/10-65	7.0 10.0 11.5	25.2 36.0 41.4	0.33 0.30 0.27	61 65 60	7.5	2900	3
4.5/15-65	10.5 15.0 16.5	37.8 54.0 59.4	0.48 0.45 0.42	64 69 63	15	2900	3
4/15-65	10.5 15.0 16.5	37.8 54.0 59.4	0.43 0.40 0.37	63 67 62	11	2900	3
4/10-65	7.0 10.0 11.5	25.2 36.0 41.4	0.43 0.40 0.37	59 64 58	7.5	2900	3
7/15-65	10.5 15.0 16.5	37.8 54.0 59.4	0.76 0.70 0.65	58 62 57	22	2900	3
6/15-65	10.5 15.0 16.5	37.8 54.0 59.4	0.65 0.60 0.55	56 60 55	18.5	2900	3
5/15-65	10.5 15.0 16.5	37.8 54.0 59.4	0.54 0.50 0.46	54 58 53	15	2900	3

XBD–SLW型泵性能参数表 XBD-SLW TYPE PUMP PERFORMANCE TABLE

型号 Model	流量 Capacity (m^3/h)	流量 Capacity (L/s)	压力 Pressure (MPa)	效率 Eff. (%)	电机功率 Power (kW)	转速 Speed (r/min)	必需汽蚀余量 (NPSH)r (m)
3/15-80	10.5 15.0 16.5	37.8 54.0 59.4	0.33 0.30 0.27	65 70 64	7.5	2900	3
4.5/15-80	10.5 15.0 16.5	37.8 54.0 59.4	0.48 0.45 0.41	63 68 62	15	2900	3
4/15-80	10.5 15.0 16.5	37.8 54.0 59.4	0.43 0.40 0.37	63 67 62	11	2900	3
4/10-80	7.0 10.0 11.5	25.2 36.0 41.4	0.43 0.40 0.37	60 65 60	7.5	2900	3
7/15-80	10.5 15.0 16.5	37.8 54.0 59.4	0.75 0.70 0.65	58 62 58	22	2900	3
6/15-80	10.5 15.0 16.5	37.8 54.0 59.4	0.65 0.60 0.55	56 60 55	18.5	2900	3
5/15-80	10.5 15.0 16.5	37.8 54.0 59.4	0.54 0.50 0.46	54 58 53	15	2900	3
11.5/15-80	10.5 15.0 16.5	37.8 54.0 59.4	1.24 1.15 1.04	48 52 47	37	2900	3
10/15-80	10.5 15.0 16.5	37.8 54.0 59.4	1.08 1.00 0.93	46 50 45	37	2900	3
10/10-80	7.0 10.0 11.5	25.2 36.0 41.4	1.08 1.00 0.93	48 52 47	30	2900	3
8/10-80	7.0 10.0 11.5	25.2 36.0 41.4	0.86 0.80 0.74	47 51 45	22	2900	3
14/15-80	10.5 15.0 16.5	37.8 54.0 59.4	1.50 1.40 1.28	48 52 47	55	2900	3
14/10-80	7.0 10.0 11.5	25.2 36.0 41.4	1.50 1.40 1.28	46 50 45	37	2900	3
13/10-80	7.0 10.0 11.5	25.2 36.0 41.4	1.40 1.30 1.20	44.5 48 43	37	2900	3
3.5/25-80	17.5 25.0 27.5	63.0 90.0 99.0	0.38 0.35 0.32	71 76 69	15	2900	4.5

型号 Model	流量 Capacity (m^3/h)	流量 Capacity (L/s)	压力 Pressure (MPa)	效率 Eff. (%)	电机功率 Power (kW)	转速 Speed (r/min)	必需汽蚀余量 (NPSH)r (m)
3/25-80	17.5 25.0 27.5	63.0 90.0 99.0	0.33 0.30 0.27	68.5 74 68	15	2900	4.5
5/25-80	17.5 25.0 27.5	63.0 90.0 99.0	0.54 0.50 0.46	68.5 74 68	22	2900	4
4.5/25-80	17.5 25.0 27.5	63.0 90.0 99.0	0.48 0.45 0.42	70 75 69	18.5	2900	4
3.8/25-80	17.5 25.0 27.5	63.0 90.0 99.0	0.41 0.38 0.35	62 71 70	15	2900	4
8/25-80	17.5 25.0 27.5	63.0 90.0 99.0	0.86 0.80 0.74	66 71 65	37	2900	4
7/25-80	17.0 25.0 27.5	61.2 90.0 99.0	0.75 0.70 0.63	63 68 62	30	2900	4
6/25-80	17.0 25.0 27.5	61.2 90.0 99.0	0.65 0.60 0.55	61 66 60	30	2900	4
12.5/25-80	17.0 25.0 27.5	61.2 90.0 99.0	1.35 1.25 1.15	62 67 61	55	2900	4
11.5/25-80	17.0 25.0 27.5	61.2 90.0 99.0	1.25 1.15 1.06	60 65 59	55	2900	4
10/25-80	17.0 25.0 27.5	61.2 90.0 99.0	1.08 1.00 0.92	60 65 59	45	2900	4
3/30-80	21.0 30.0 33.0	75.6 108.0 118.8	0.33 0.30 0.27	71 76 69	15	2900	4.5
4.5/30-80	21.0 30.0 33.0	75.6 108.0 118.8	0.48 0.45 0.42	68.5 74 68	22	2900	4
8/30-80	21.0 30.0 33.0	75.6 108.0 118.8	0.86 0.80 0.74	66 71 65	37	2900	4
6/30-80	21.0 30.0 33.0	75.6 108.0 118.8	0.65 0.60 0.55	63 68 62	30	2900	4
12/30-80	21.0 30.0 33.0	75.6 108.0 118.8	1.30 1.20 1.10	62 67 61	55	2900	4

XBD–SLW型泵性能参数表 XBD-SLW TYPE PUMP PERFORMANCE TABLE

型号 Model	流量 Capacity (m^3/h)	流量 Capacity (L/s)	压力 Pressure (MPa)	效率 Eff. (%)	电机功率 Power (kW)	转速 Speed (r/min)	必需汽蚀余量 (NPSH)r (m)
10/30-80	21.0 30.0 33.0	75.6 108.8 118.8	1.08 1.02 0.92	60 65 59	55	2900	4
3.2/25-100	17.0 25.0 27.5	61.2 90.0 99.0	0.35 0.32 0.30	70 76 69	15	2900	4.5
5/25-100	17.0 25.0 27.5	61.2 90.0 99.0	0.54 0.50 0.46	69 75 68	22	2900	4
4.5/25-100	17.0 25.0 27.5	61.2 90.0 99.0	0.48 0.45 0.42	67 73 66	18.5	2900	4
4/20-100	14.0 20.0 22.0	50.4 72.0 79.2	0.43 0.40 0.37	66 71 65	15	2900	4
8/25-100	17.0 25.0 27.5	61.2 90.0 99.0	0.85 0.80 0.74	66 71 65	37	2900	4
7/25-100	17.0 25.0 27.5	61.2 90.0 99.0	0.75 0.70 0.65	64 68 63	30	2900	4
6/20-100	14.0 20.0 22.0	50.4 72.0 79.2	0.65 0.60 0.55	56 60 55	30	2900	4
13/25-100	17.0 25.0 27.5	61.2 90.0 99.0	1.40 1.30 1.20	63 66 62	75	2900	4
11/25-100	17.0 25.0 27.5	61.2 90.0 99.0	1.18 1.10 1.01	60 65 59	55	2900	4
10/25-100	17.0 25.0 27.5	61.2 90.0 99.0	1.08 1.00 0.92	60 65 59	45	2900	4
15/25-100	17.0 25.0 27.5	61.2 90.0 99.0	1.62 1.50 1.38	60 65 59	75	2900	4
14/25-100	17.0 25.0 27.5	61.2 90.0 99.0	1.50 1.40 1.28	58 63 57	75	2900	4
13.5/20-100	14.0 20.0 22.0	50.4 72.0 79.2	1.45 1.35 1.24	56 60 55	55	2900	4
3/30-100	21.0 30.0 33.0	75.6 108.0 118.8	0.33 0.30 0.27	70 76 69	15	2900	4.5

型号 Model	流量 Capacity (m^3/h)	流量 Capacity (L/s)	压力 Pressure (MPa)	效率 Eff. (%)	电机功率 Power (kW)	转速 Speed (r/min)	必需汽蚀余量 (NPSH)r (m)
4.5/30-100	21.0 30.0 33.0	75.6 108.0 118.8	0.48 0.45 0.42	67 73 66	18.5	2900	4
8/30-100	21.0 30.0 33.0	75.6 108.0 118.8	0.86 0.80 0.74	66 71 65	37	2900	4
6/30-100	21.0 30.0 33.0	75.6 108.0 118.8	0.65 0.60 0.55	64 68 63	30	2900	4
12/30-100	21.0 30.0 33.0	75.6 108.0 118.8	1.30 1.20 1.10	63 66 62	75	2900	4
10/30-100	21.0 30.0 33.0	75.6 108.0 118.8	1.08 1.00 0.98	60 60 59	45	2900	4
14.5/30-100	21.0 30.0 33.0	75.6 108.0 118.8	1.55 1.45 1.35	60 65 59	75	2900	4
	31.5 45.0 49.5	113.4 162.0 178.2	0.33 0.30 0.27	72 78 71	22	2900	4
3/40-125	28.0 40.0 44.0	100.8 144.0 158.4	0.33 0.30 0.27	70 75 69	18.5	2900	4
5/45-125	31.5 45.0 49.5	113.4 162.0 178.2	0.54 0.50 0.46	70 76 69	37	2900	4
4.5/40-125	28.0 40.0 44.0	100.8 144.0 158.2	0.48 0.45 0.42	70 76 69	30	2900	4
4/30-125	21.0 30.0 33.0	75.6 108.0 118.8	0.43 0.40 0.37	69 75 68	22	2900	4
7.5/45-125	31.5 45.0 49.5	113.4 162.0 178.2	0.80 0.75 0.68	69 75 68	55	2900	4
7/40-125	28.0 40.0 44.0	100.8 144.0 158.4	0.75 0.70 0.64	65 70 64	45	2900	4
6/35-125	24.5 35.0 38.5	88.2 126.0 138.6	0.64 0.60 0.56	56 60 55	45	2900	4
12.5/45-125	31.5 45.0 49.5	113.4 162.0 178.2	1.36 1.25 1.			2900	4

XBD–SLW型泵性能参数表 XBD-SLW TYPE PUMP PERFORMANCE TABLE

型号 Model	流量 Capacity (m^3/h)	流量 Capacity (L/s)	压力 Pressure (MPa)	效率 Eff. (%)	电机功率 Power (kW)	转速 Speed (r/min)	必需汽蚀余量 (NPSH)r (m)
11/40-125	28.0 40.0 44.0	100.8 144.0 158.4	1.18 1.10 1.00	56 70 55	90	2900	4
10/40-125	28.0 40.0 44.0	100.8 144.0 158.4	1.08 1.00 0.92	64 69 63	75	2900	4
3/45-150	31.5 45.0 49.5	113.4 162.0 178.2	0.33 0.30 0.27	72 78 71	22	2900	4
3/40-150	28.0 40.0 44.0	100.8 144.0 158.4	0.33 0.30 0.27	70 76 69	18.5	2900	4
8/55-150	38.5 55.0 60.5	138.6 198.0 217.8	0.86 0.80 0.74	70 76 70	75	2900	4.5
7/50-150	35.0 50.0 55.0	126.0 180.0 198.0	0.76 0.70 0.64	68 75 68	55	2900	4.5
6/45-150	31.5 45.0 49.5	113.4 162.0 178.2	0.65 0.60 0.55	67 74 67	45	2900	4.5
3.2/55-150	38.5 55.0 60.5	138.6 198.0 217.8	0.35 0.32 0.29	72 78 71.5	30	2900	3.5
3/50-150	35.0 50.0 55.0	126.0 180.0 198.0	0.33 0.30 0.27	71 77 70	30	2900	3.5
12.5/55-150	38.5 55.0 60.5	138.6 198.0 217.8	1.35 1.25 1.			2900	4.5
11/50-150	35.0 50.0 55.0	126.0 180.0 198.0	1.18 1.10 1.00	68 74 67	90	2900	4.5
9/50-150	35.0 50.0 55.0	126.0 180.0 198.0	0.98 0.90 0.83	66 72 65	75	2900	4.5
15/40-150	28.0 40.0 44.0	100.8 144.0 158.4	1.61 1.50 1.38	65 70 64	110	2900	4.5
14/40-150	28.0 40.0 44.0	100.8 144.0 158.4	1.52 1.40 1.28	64 69 63	90	2900	4.5
10/40-150	28.0 40.0 44.0	100.8 144.0 158.4	1.08 1.00 0.92	62 67 61	75	2900	4.5


型号 Model	流量 Capacity (m^3/h)	流量 Capacity (L/s)	压力 Pressure (MPa)	效率 Eff. (%)	电机功率 Power (kW)	转速 Speed (r/min)	必需汽蚀余量 (NPSH)r (m)
5/55-150	38.5 55.0 60.5	138.6 198.0 217.8	0.54 0.50 0.46	69 75 68	45	1450	3.5
4.4/50-150	35.0 50.0 55.0	126.0 180.0 198.0	0.48 0.44 0.40	68 74 67	37	1450	3.5
4/45/150	31.5 45.0 49.5	113.4 162.0 178.2	0.43 0.40 0.37	67 73 66	30	1450	3.5
3.2/55-200	38.5 55.0 60.5	138.6 198.0 217.8	0.35 0.32 0.29	72 78 71	30	1450	3.5
5/50-200	35.0 50.0 55.0	126.0 180.0 198.0	0.54 0.50 0.46	70 75 69	45	1450	3.5
4.4/50-200	35.0 50.0 55.0	126.0 180.0 198.0	0.48 0.44 0.40	68 74 67	37	1450	3.5
3.5/50-200	35.0 50.0 55.0	126.0 180.0 198.0	0.38 0.35 0.32	67 73 65.8	30	1450	3.5
3.2/40-200	28.0 40.0 44.0	100.8 144.0 158.4	0.35 0.32 0.29	66 71 65	22	1450	3.5
3.2/110-200	82.5 110.0 121.0	297.0 396.0 435.6	0.35 0.32 0.29	74 80 72	55	1450	4
3/100-200	75.0 100.0 110.0	270.0 360.0 396.0	0.33 0.30 0.27	72.5 79 71.5	45	1450	4
5/110-200	82.5 110.0 121.0	297.0 396.0 435.6	0.54 0.50 0.45	75 81 74	90	1450	4
4/100-200	75.0 100.0 110.0	270.0 360.0 396.0	0.43 0.40 0.37	74 80 73	75	1450	4
4/95-200	72.0 95.0 105.0	259.2 342.0 378.0	0.43 0.40 0.37	72.5 78 72	55	1450	5
3.2/85-200	65.0 85.0 95.0	234.0 306.0 342.0	0.35 0.32 0.29	70 76 69	45	1450	5
8.0/100-200	82.5 100.0 121.0	297.0 360.0 435.6	0.86 0.80 0.74	72.5 78 72	132	1450	4

XBD–SLW型泵性能参数表 XBD-SLW TYPE PUMP PERFORMANCE TABLE

型号 Model	流量 Capacity (m^3/h)	流量 Capacity (L/s)	压力 Pressure (MPa)	效率 Eff. (%)	电机功率 Power (kW)	转速 Speed (r/min)	必需汽蚀余量 (NPSH)r (m)
7/100-200	75.0 100.0 110.0	270.0 360.0 396.0	0.75 0.70 0.63	71 75 72	110	1450	4
6/95-200	72.0 95.0 105.0	259.2 342.5 378.5	0.65 0.60 0.55	70 74 71	90	1450	4
5/85-200	65.0 85.0 95.0	234.0 306.0 342.0	0.54 0.50 0.45	69 73 70	75	1450	4
3.2/135-250	100.0 135.0 150.0	360.0 486.0 540.0	0.35 0.32 0.29	74 80 73	75	1450	5.5
3/130-250	95.0 130.0 145.0	342.0 468.0 522.0	0.33 0.30 0.27	72.5 78 72	75	1450	5.5
5/135-250	100.0 135.0 150.0	360.0 486.0 540.0	0.54 0.50 0.45	77 84 75.6	90	1450	5.5
4.4/130-250	95.0 130.0 145.0	342.0 468.0 522.0	0.48 0.44 0.40	76 83 74	90	1450	5.5
3.5/130-250	95.0 130.0 145.0	342.0 468.0 522.0	0.39 0.35 0.10	75 81.5 73	75	1450	5.5
8/150-250	110.0 150.0 170.0	396.0 540.0 612.0	0.86 0.80 0.72	79 80 78	160	1450	5.5
7/135-250	100.0 135.0 150.0	360.0 486.0 540.0	0.75 0.70 0.63	78 79 77	132	1450	5.5
6/130-250	95.0 130.0 145.0	342.0 468.0 522.0	0.65 0.60 0.55	77 78 76	110	1450	5.5

型号 Model	流量 Capacity (m^3/h)	流量 Capacity (L/s)	压力 Pressure (MPa)	效率 Eff. (%)	电机功率 Power (kW)	转速 Speed (r/min)	必需汽蚀余量 (NPSH)r (m)
3/180-300	135.0 180.0 200.0	486.0 648.0 720.0	0.33 0.30 0.27	75.5 82 74	75	1450	5
3.2/200-300	140.0 200.0 220.0	504.0 720.0 792.0	0.33 0.32 0.28	77 84 75.6	90	1450	4.5
3/165-300	125.0 165.0 185.0	450.0 594.0 666.0	0.33 0.30 0.27	72.5 78 71	75	1450	4.5
5/165-300	125.0 165.0 185.0	450.0 594.0 666.0	0.54 0.50 0.45	72.5 78 71	132	1450	5
8/200-300	140.0 200.0 220.0	504.0 720.0 792.0	0.86 0.80 0.72	78 80 78	250	1450	5.5
7/180-300	135.0 180.0 200.0	486.0 648.0 720.0	0.75 0.70 0.63	77 79 77	200	1450	5.5
6/165-300	125.0 165.0 185.0	450.0 594.0 666.0	0.65 0.60 0.55	76 78 76	160	1450	5.5
5/165-300	125.0 165.0 185.0	450.0 594.0 666.0	0.48 0.42 0.42	75 77 75	110	1450	5.5
3.2/200-350	150.0 200.0 222.0	540.0 720.0 800.0	0.35 0.32 0.28	77 84 75.6	90	1450	4.5
5/200-350	150.0 200.0 222.0	540.0 720.0 800.0	0.54 0.50 0.45	76.5 83 75	160	1450	4.5

XBD–SLW型泵安装尺寸图 XBD-SLW TYPE PUMP DIMENSION FIGURE

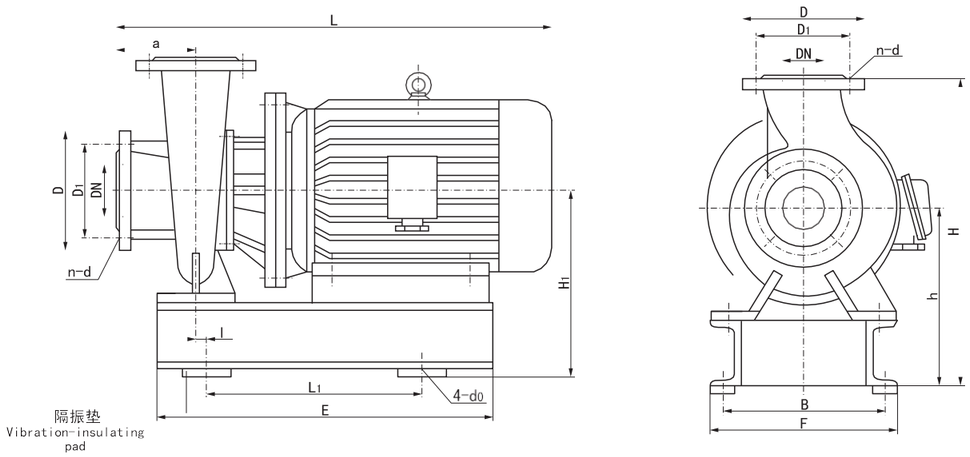

XBD–SLW型泵安装尺寸表 XBD-SLW TYPE PUMP DIMENSION TABLE

型号 Model	外形尺寸 Figure dimension				安装尺寸 Installing dimension						进出口法兰尺寸 In-outlet flange dimension				隔振垫 Vibration-insulating pas	
	L	H	E	F	a	h	L1	B	I	4-d0	DN	D	D1	n-d	型号 Model	H1
3.5/5-50	558	416	405	245	100	241	260	200	20	Φ	Φ	Φ	Φ	-Φ19	SD41-0.5	270
3/5-50	558	416	405	245	100	241	260	200	20	Φ	Φ	Φ	Φ	-Φ19	SD41-0.5	270
5/5-50	617	461	440	280	100	271	330	240	2.5	Φ	Φ	Φ	Φ	-Φ19	SD61-0.5	295
4.5/5-50	617	461	440	280	100	271	330	240	2.5	Φ	Φ	Φ	Φ	-Φ19	SD61-0.5	295
4/5-50	617	461	440	280	100	271	330	240	2.5	Φ	Φ	Φ	Φ	-Φ19	SD61-0.5	295
8/5-50	743	531	560	330	105	291	400	290	15	Φ	Φ	Φ	Φ	-Φ19	SD61-1	315
7/5-50	743	531	560	330	105	291	400	290	15	Φ	Φ	Φ	Φ	-Φ19	SD61-1	315
6/5-50	743	531	560	330	105	291	400	290	15	Φ	Φ	Φ	Φ	-Φ19	SD61-0.5	315
12.5/5-50	814	591	690	355	105	320	500	320	10	Φ	Φ	Φ	Φ	-Φ19	SD61-1.5	345
11.5/5-50	794	591	690	355	105	320	480	320	10	Φ	Φ	Φ	Φ	-Φ19	SD61-1	345
10/5-50	794	591	620	355	105	320	480	320	10	Φ	Φ	Φ	Φ	-Φ19	SD61-1	345
3.5/5-65	558	411	405	245	100	241	260	200	20	Φ	Φ	Φ	Φ	-Φ19	SD41-0.5	270
3/5-65	558	411	405	245	100	241	260	200	20	Φ	Φ	Φ	Φ	-Φ19	SD41-0.5	270
5.5/5-65	617	461	440	280	100	271	330	240	2.5	Φ	Φ	Φ	Φ	-Φ19	SD61-0.5	295
4.5/5-65	617	461	440	280	100	271	330	240	2.5	Φ	Φ	Φ	Φ	-Φ19	SD61-0.5	295
4/5-65	617	461	440	280	100	271	330	240	2.5	Φ	Φ	Φ	Φ	-Φ19	SD61-0.5	295
8.5/5-65	743	531	560	330	105	291	400	290	15	Φ	Φ	Φ	Φ	-Φ19	SD61-1	315
7.5/5-65	743	531	560	330	105	291	400	290	15	Φ	Φ	Φ	Φ	-Φ19	SD61-1	315
6.5/5-65	743	531	560	330	105	291	400	290	15	Φ	Φ	Φ	Φ	-Φ19	SD61-0.5	315
13.5/5-65	814	590	620	355	105	320	500	320	10	Φ	Φ	Φ	Φ	-Φ19	SD61-1.5	345

XBD–SLW型泵安装尺寸表 XBD-SLW TYPE PUMP DIMENSION TABLE

型号 Model	外形尺寸 Figure dimension				安装尺寸 Installing dimension						进出口法兰尺寸 In-outlet flange dimension				隔振垫 Vibration-insulating pas	
	L	H	E	F	a	h	L1	B	I	4-d0	DN	D	D1	n-d	型号 Model	H1
12/5-65	814	590	620	355	105	320	500	320	10	Φ	Φ	Φ	Φ	-Φ19	SD61-1	345
10/5-65	795	590	620	355	105	320	480	320	10	Φ	Φ	Φ	Φ	-Φ19	SD61-1	345
3.5/10-65	638	471	455	290	120	271	300	250	20	Φ	Φ	Φ	Φ	-Φ19	SD61-1	295
3/10-65	638	471	455	290	120	271	300	250	20	Φ	Φ	Φ	Φ	-Φ19	SD61-1	295
4.5/15-65	745	486	555	330	105	271	400	295	20	Φ	Φ	Φ	Φ	-Φ19	SD61-1	295
4/15-65	745	486	555	330	105	271	400	295	20	Φ	Φ	Φ	Φ	-Φ19	SD61-1	295
4/10-65	645	486	430	290	105	271	320	255	20	Φ	Φ	Φ	Φ	-Φ19	SD61-1	295
7/15-65	830	531	625	360	125	291	440	320	17.5	Φ	Φ	Φ	Φ	-Φ19	SD61-1	315
6/15-65	810	531	620	335	125	291	440	295	17.5	Φ	Φ	Φ	Φ	-Φ19	SD61-1	315
5/15-65	765	531	575	335	125	291	400	295	17.5	Φ	Φ	Φ	Φ	-Φ19	SD61-1	315
3/15-80	638	471	455	290	120	271	300	250	20	Φ	Φ	Φ	Φ	-Φ19	SD61-1	295
4.5/15-80	745	486	555	330	105	271	400	295	20	Φ	Φ	Φ	Φ	-Φ19	SD61-1	295
4/15-80	745	486	555	330	105	271	400	295	20	Φ	Φ	Φ	Φ	-Φ19	SD61-1	295
4/10-80	645	486	455	290	105	271	320	255	20	Φ	Φ	Φ	Φ	-Φ19	SD61-1	295
7/15-80	830	531	625	360	125	291	440	320	17.5	Φ	Φ	Φ	Φ	-Φ19	SD61-1	315
6/15-80	810	531	620	335	125	291	440	295	17.5	Φ	Φ	Φ	Φ	-Φ19	SD61-1	315
5/15-80	765	531	575	335	125	291	400	295	17.5	Φ	Φ	Φ	Φ	-Φ19	SD61-1	315
11.5/15-80	952	650	760	410	135	360	540	370	35	Φ	Φ	Φ	Φ	-Φ19	SD61-1.5	390
10/15-80	952	650	720	410	135	360	540	370	25	Φ	Φ	Φ	Φ	-Φ19	SD61-1	390
10/10-80	952	650	720	410	135	360	540	370	25	Φ	Φ	Φ	Φ	-Φ19	SD61-1	390
8/10-80	847	650	720	360	135	360	460	320	25	Φ	Φ	Φ	Φ	-Φ19	SD61-1	390
14/15-80	1100	700	830	500	135	385	650	460	5	Φ	Φ	Φ	Φ	-Φ19	SD61-1.5	425
14/10-80	975	690	765	400	135	375	570	360	5	Φ	Φ	Φ	Φ	-Φ19	SD61-1.5	405
13/10-80	975	690	735	400	135	375	570	360	5	Φ	Φ	Φ	Φ	-Φ19	SD61-1.5	405
3.5/25-80	758	521	575	330	110	271	400	295	17.5	Φ	Φ	Φ	Φ	-Φ19	SD61-1	295
3/25-80	758	521	575	330	110	271	400	295	17.5	Φ	Φ	Φ	Φ	-Φ19	SD61-1	295
5/25-80	812	531	625	355	105	291	440	320	22.5	Φ	Φ	Φ	Φ	-Φ19	SD61-1	315
4.5/25-80	792	531	615	330	105	291	440	295	22.5	Φ	Φ	Φ	Φ	-Φ19	SD61-1	315
3.8/25-80	749	531	575	330	105	291	400	295	22.5	Φ	Φ	Φ	Φ	-Φ19	SD61-1	315
8/25-80	944	610	710	395	125	335	520	355	10	Φ22	Φ80	Φ200	Φ160	8-Φ19	SD62-1.5	388
7/25-80	944	610	710	395	125	335	520	355	10	Φ22	Φ80	Φ200	Φ160	8-Φ19	SD62-1.5	388
6/25-80	944	610	710	395	125	335	520	355	10	Φ22	Φ80	Φ200	Φ160	8-Φ19	SD62-1	388
12.5/25-80	1075	710	820	490	130	385	640	450	7.5	Φ22	Φ80	Φ200	Φ160	8-Φ19	SD62-1.5	443
11.5/25-80	1075	710	820	490	130	385	640	450	7.5	Φ22	Φ80	Φ200	Φ160	8-Φ19	SD62-1.5	443
10/25-80	990	710	760	445	130	385	570	405	7.5	Φ22	Φ80	Φ200	Φ160	8-Φ19	SD62-1.5	443
3/30-80	758	521	575	330	110	271	400	295	17.5	Φ	Φ	Φ	Φ	-Φ19	SD61-1	295
4.5/30-80	812	521	620	355	105	291	440	320	22.5	Φ	Φ	Φ	Φ	-Φ19	SD61-1	315
8/30-80	944	610	710	395	125	335	520	355	10	Φ22	Φ80	Φ200	Φ160	8-Φ19	SD62-1.5	388
6/30-80	944	610	710	395	125	335	520	355	10	Φ22	Φ80	Φ200	Φ160	8-Φ19	SD62-1.5	388
12/30-80	1075	710	820	490	130	385	640	450	7.5	Φ22	Φ80	Φ200	Φ160	8-Φ19	SD62-1.5	443


XBD–SLW型泵安装尺寸表 XBD-SLW TYPE PUMP DIMENSION TABLE

型号 Model	外形尺寸 Figure dimension				安装尺寸 Installing dimension						进出口法兰尺寸 In-outlet flange dimension				隔振垫 Vibration-insulating pas	
	L	H	E	F	a	h	L_1	B	I	4-d_0	DN	D	D_1	n-d	型号 Model	H_1
10/30-80	1075	710	820	490	130	385	640	450	7.5	Φ22	Φ80	Φ200	Φ160	8-Φ19	SD62-1.5	443
3.2/25-100	758	521	575	330	110	271	400	295	17.5	Φ	Φ	Φ	Φ	8-Φ19	SD61-1	295
5/25-100	814	531	625	355	105	291	440	320	22.5	Φ	Φ	Φ	Φ	8-Φ19	SD61-1	315
4.5/25-100	794	531	615	330	105	291	440	295	22.5	Φ	Φ	Φ	Φ	8-Φ19	SD61-1	315
4/20-100	749	531	575	330	105	291	400	295	20	Φ	Φ	Φ	Φ	8-Φ19	SD61-1	315
8/25-100	944	610	710	395	125	335	520	355	10	Φ22	Φ100	Φ220	Φ180	8-Φ19	SD62-1.5	388
7/25-100	944	610	710	395	125	335	520	355	10	Φ22	Φ100	Φ220	Φ180	8-Φ19	SD62-1.5	388
6/20-100	944	610	710	395	125	335	520	355	10	Φ22	Φ100	Φ220	Φ180	8-Φ19	SD62-1	388
13/25-100	1145	740	875	550	130	415	660	510	32.5	Φ22	Φ100	Φ220	Φ180	8-Φ19	SD62-1.5	473
11/25-100	1075	710	820	490	130	385	640	450	7.5	Φ22	Φ100	Φ220	Φ180	8-Φ19	SD62-1.5	443
10/25-100	990	710	760	445	130	385	570	405	7.5	Φ22	Φ100	Φ220	Φ180	8-Φ19	SD62-1.5	443
15/25-100	1154	755	890	560	130	415	670	520	20	Φ22	Φ100	Φ220	Φ180	8-Φ19	SD62-2	468
14/25-100	1154	755	890	560	130	415	670	520	20	Φ22	Φ100	Φ220	Φ180	8-Φ19	SD62-2	468
13.5/20-100	1084	755	840	510	130	370	630	470	30	Φ22	Φ100	Φ220	Φ180	8-Φ19	SD62-2	413
3/30-100	758	521	575	330	110	271	400	295	17.5	Φ	Φ	Φ	Φ	8-Φ19	SD61-1	295
4.5/30-100	794	531	625	330	105	291	440	295	22.5	Φ	Φ	Φ	Φ	8-Φ19	SD61-1	315
8/30-100	944	610	710	395	125	335	520	355	10	Φ22	Φ100	Φ220	Φ180	8-Φ19	SD62-1.5	388
6/30-100	944	610	710	395	125	335	520	355	10	Φ22	Φ100	Φ220	Φ180	8-Φ19	SD62-1.5	388
12/30-100	1145	740	875	550	130	415	660	510	32.5	Φ22	Φ100	Φ220	Φ180	8-Φ19	SD62-1.5	473
10/30-100	990	710	760	445	130	385	570	405	7.5	Φ22	Φ100	Φ220	Φ180	8-Φ19	SD62-1.5	443
14.5/30-100	1154	755	890	560	130	415	670	520	20	Φ22	Φ100	Φ220	Φ180	8-Φ19	SD62-2	468
3/45-125	836	546	630	355	125	291	440	320	22.5	Φ22	Φ125	Φ250	Φ210	8-Φ19	SD61-1	615
3/40-125	815	546	620	330	125	291	440	295	22.5	Φ22	Φ125	Φ250	Φ210	8-Φ19	SD61-1	615
5/45-125	940	615	730	395	130	335	540	355	5	Φ22	Φ125	Φ250	Φ210	8-Φ19	SD61-1	365
4.5/40-125	940	615	730	395	130	335	540	355	5	Φ22	Φ125	Φ250	Φ210	8-Φ19	SD61-1	365
4/30-125	835	595	640	360	130	315	460	325	5	Φ22	Φ125	Φ250	Φ210	8-Φ19	SD61-1	335
7.5/45-125	1103	685	830	490	150	385	640	450	10	Φ22	Φ125	Φ250	Φ210	8-Φ19	SD62-1	438
7/40-125	1018	660	770	435	150	360	560	395	10	Φ22	Φ125	Φ250	Φ210	8-Φ19	SD62-1	413
6/35-125	1018	660	770	435	150	360	560	395	10	Φ22	Φ125	Φ250	Φ210	8-Φ19	SD62-1	413
12.5/45-125				650	135	430	750	610	25	Φ22	Φ125	Φ250	Φ210	8-Φ19	SD62-1	509
11/40-125	1203	755	920	550	135	415	720	510	25	Φ22	Φ125	Φ250	Φ210	8-Φ19	SD62-1	473
10/40-125	1153	755	855	550	135	415	660	510	30	Φ22	Φ125	Φ250	Φ210	8-Φ19	SD62-1	473
3/45-150	836	546	620	360	125	291	440	320	22.5	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD61-1	315
3/40-150	816	546	620	330	125	291	440	295	22.5	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD61-1	315
3.2/55-150	962	795	750	510	135	415	520	470	10	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD62-1	468
3/50-150	962	795	750	510	135	415	520	470	10	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD62-1	468
15/40-150				650	135	450	760	610	10	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD62-1.5	503
14/40-150	1232	844	1000	650	135	450	730	520	10	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD62-1.5	503
10/40-150	1182	805	905	560	135	415	680	520	10	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD62-1.5	468
5/55-150	1023	855	775	510	155	450	540	470	10	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD62-1.5	503

XBD–SLW型泵安装尺寸表 XBD-SLW TYPE PUMP DIMENSION TABLE

型号 Model	外形尺寸 Figure dimension				安装尺寸 Installing dimension						进出口法兰尺寸 In-outlet flange dimension				隔振垫 Vibration-insulating pas	
	L	H	E	F	a	h	L_1	B	I	4-d_0	DN	D	D_1	n-d	型号 Model	H_1
4.4/50-150	998	855	745	510	155	450	520	470	10	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD62-1	503
4/45/150	983	855	745	510	155	450	520	470	10	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD62-1	503
8/55-150	1165	750	875	560	145	415	640	520	40	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD61-1	468
7/50-150	1095	720	825	500	145	385	620	460	20	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD61-1	448
6/45-150	1010	720	760	440	145	385	540	400	20	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD62-1	438
12.5/55-150				650	135	454	760	605	15	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD62-1.5	503
11/50-150	1220	805	955	560	135	415	720	520	15	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD62-1.5	468
9/50-150	1170	805	905	560	135	415	680	520	10	Φ22	Φ150	Φ285	Φ240	8-Φ23	SD62-1.5	468
3.2/55-200	980	790	750	520	155	415	520	480	10	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD62-1	468
5/50-200	1025	885	775	500	155	450	540	460	10	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD62-1	503
4.4/50-200	1000	885	745	500	155	450	520	460	10	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD61-1	503
3.5/50-200	985	885	745	500	155	450	520	460	10	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD61-1	503
3.2/40-200	920	865	715	500	155	430	480	460	10	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD62-1	473
3.2/110-200	1122	875	860	555	152	455	620	515	15	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD62-1	508
3/100-200	1037	875	790	555	152	455	560	515	10	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD62-1	508
5/110-200	1250	900	985	560	145	450	760	520	15	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD62-1.5	503
4/100-200	1185	900	905	560	145	450	700	520	10	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD62-1.5	503
4/95-200	1115	900	855	560	145	450	640	520	5	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD62-1	503
3.2/85-200	1030	900	790	560	145	450	580	520	5	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD62-1	503
8.0/100-200	1572	1055	1135	650	185	515	850	610	5	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD61-1	568
7/100-200	1572	1055	1055	650	185	515	760	610	5	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD61-1	568
6/95-200	1290	1055	990	640	185	515	760	600	5	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD62-1	518
5/85-200	1240	1055	940	640	185	515	710	600	-5	Φ22	Φ200	Φ340	Φ295	12-Φ23	SD62-1	518
3.2/135-250	1260	960	910	600	225	465	700	560	10	Φ22	Φ250	Φ405	Φ355	12-Φ28	SD62-1.5	518
3/130-250	1260	960	910	600	225	465	700	560	10	Φ22	Φ250	Φ405	Φ355	12-Φ28	SD62-1.5	518
5/135-250	1282	1000	990	570	197	465	760	530	15	Φ22	Φ250	Φ405	Φ355	12-Φ28	SD62-1.5	518
4.4/130-250	1282	1000	990	570	197	465	760	530	15	Φ22	Φ250	Φ405	Φ355	12-Φ28	SD62-1.5	518
3.5/130-250	1267	1000	905	570	197	465	680	530	15	Φ22	Φ250	Φ405	Φ355	12-Φ28	SD62-1.5	518
8/150-250	1607	1155	1160	660	220	555	860	620	30	Φ22	Φ250	Φ405	Φ355	12-Φ28	SD62-1.5	608
7/135-250	1607	1155	1135	660	220	555	860	620	5	Φ22	Φ250	Φ405	Φ355	12-Φ28	SD62-1.5	608
6/130-250	1537	1155	1055	660	220	555	780	620	10	Φ22	Φ250	Φ405	Φ355	12-Φ28	SD62-1.5	608
3/180-300				690	245	535	800	650	-45	Φ26	Φ300	Φ460	Φ410	12-Φ28	SD62-1.5	593
3.2/200-300	1370	1085	1015	620	260	485	740	580	15	Φ26	Φ300	Φ460	Φ410	12-Φ28	SD62-2	540
3/165-300				620	260	485	680	580	15	Φ26	Φ300	Φ460	Φ410	12-Φ28	SD62-2	540
5/165-300	1645	1129	1170	660	255	534	860	620	25	Φ26	Φ300	Φ460	Φ410	12-Φ28	SD62-2.5	593
8/200-300	1915	1244	1330	750	300	594	1200	710	10	Φ26	Φ300	Φ460	Φ410	12-Φ28	SD62-2.5	643
7/180-300	1836	1244	1290	750	300	594	1160	710	10	Φ26	Φ300	Φ460	Φ410	12-Φ28	SD62-2.5	643
6/165-300	1836	1244	1290	750	300	594	1160	710	10	Φ26	Φ300	Φ460	Φ410	12-Φ28	SD62-2.5	643
4.5/165-300	1695	1244	1090	750	300	594	900	710	10	Φ26	Φ300	Φ460	Φ410	12-Φ28	SD62-2	643
3.2/200-350				660	280	535	760	620	-45	Φ26	Φ300	Φ460	Φ410	12-Φ28	SD62-2.5	573
5/200-350	1816	1204	1180	660	285	549	880	620	30	Φ26	Φ300	Φ460	Φ410	12-Φ28		603

XBD–SLW型泵安装基础图 XBD-SLW TYPE PUMP INSTALLATION BASIC FIGURE

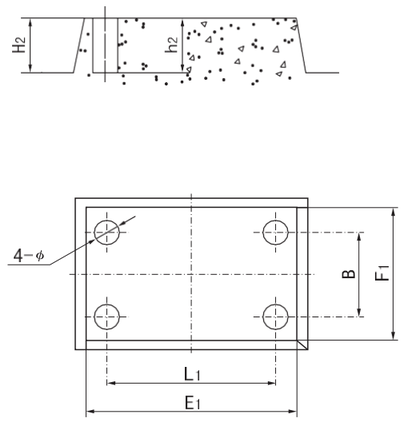

XBD–SLW型泵基础尺寸表 XBD-SLW TYPE PUMP INSTALLATION BASIC TABLE

型号 Model	E1	F1	L1	B	ϕ	h2	H2
3.5/5-50	510	395	260	200	60	200	200
3/5-50	510	395	260	200	60	200	200
5/5-50	550	430	330	240	60	200	200
4.5/5-50	550	430	330	240	60	200	200
4/5-50	550	430	330	240	60	200	200
8/5-50	670	480	400	290	60	200	200
7/5-50	670	480	400	290	60	200	200
6/5-50	670	480	400	290	60	200	200
12.5/5-50	730	505	500	320	60	200	200
11.5/5-50	710	505	480	320	60	200	200
10/5-50	710	505	480	320	60	200	200
3.5/5-65	510	395	260	200	60	200	200
3/5-65	510	395	260	200	60	200	200
5.5/5-65	550	430	330	240	60	200	200
4.5/5-65	550	430	330	240	60	200	200
4/5-65	550	430	330	240	60	200	200
8.5/5-65	670	480	400	290	60	200	200
7.5/5-65	670	480	400	290	60	200	200
6.5/5-65	670	480	400	290	60	200	200
13.5/5-65	730	505	500	320	60	200	200
12/5-65	730	505	500	320	60	200	200
10/5-65	710	505	480	320	60	200	200
3.5/10-65	540	440	300	250	60	200	200
3/10-65	540	440	300	250	60	200	200
4.5/15-65	655	480	400	295	60	200	200

型号 Model	E1	F1	L1	B	ϕ	h2	H2
4/15-65	655	480	400	295	60	200	200
4/10-65	560	440	330	255	60	200	200
7/15-65	710	510	440	320	60	200	200
6/15-65	710	485	440	295	60	200	200
5/15-65	665	485	400	295	60	200	200
3/15-80	540	440	300	250	60	200	200
4.5/15-80	655	480	400	295	60	200	200
4/15-80	655	480	400	295	60	200	200
4/10-80	530	440	320	255	60	200	200
7/15-80	710	510	440	320	60	200	200
6/15-80	710	485	440	295	60	200	200
5/15-80	665	485	400	295	60	200	200
11.5/15-80	800	560	540	370	60	200	200
10/15-80	800	560	540	370	60	200	200
10/10-80	800	560	540	370	60	200	200
8/10-80	720	510	460	320	60	200	200
14/15-80	940	650	650	460	60	200	200
14/10-80	860	550	540	360	60	200	200
13/10-80	860	550	540	360	60	200	200
3.5/25-80	680	480	400	295	60	200	200
3/25-80	680	480	400	295	60	200	200
5/25-80	730	505	440	320	60	200	200
4.5/25-80	720	480	440	295	60	200	200
3.8/25-80	680	480	400	295	60	200	200
8/25-80	820	545	520	355	60	250	300
7/25-80	820	545	520	355	60	250	300

XBD–SLW型泵基础尺寸表 XBD-SLW TYPE PUMP INSTALLATION BASIC TABLE

型号 Model	E1	F1	L1	B	ϕ	h2	H2
6/25-80	820	545	520	355	80	250	300
12.5/25-80	930	640	640	450	80	250	300
11.5/25-80	930	640	640	450	80	250	300
10/25-80	860	595	570	405	80	250	300
3/30-80	680	480	400	295	60	200	200
4.5/30-80	730	505	440	320	60	200	200
8/30-80	820	545	520	355	80	250	300
6/30-80	820	545	520	355	80	250	300
12/30-80	930	640	640	450	80	250	300
10/30-80	930	640	640	450	80	250	300
3.2/25-100	680	480	400	295	60	200	200
5/25-100	730	505	440	320	60	200	200
4.5/25-100	720	480	440	295	60	200	200
4/20-100	680	480	400	295	60	200	200
8/25-100	820	545	520	355	80	250	300
7/25-100	820	545	520	355	80	250	300
6/20-100	820	545	520	355	80	250	300
13/25-100	1000	700	660	510	80	250	300
11/25-100	930	640	640	450	80	250	300
10/25-100	860	595	570	405	80	250	300
15/25-100	1000	710	670	520	80	250	300
14/25-100	1000	710	670	520	80	250	300
13.5/20-100	940	660	630	470	80	250	300
3/30-100	680	480	400	295	60	200	200
4.5/30-100	720	480	440	295	60	200	200
8/30-100	820	545	520	355	80	250	300
6/30-100	820	545	520	355	80	250	300
10/30-100	860	595	570	405	80	250	300
12/30-100	1000	700	660	510	80	250	300
14.5/30-100	1000	710	670	520	80	250	300
3/45-125	730	505	440	320	80	250	300
3/40-125	720	480	440	295	80	250	300
5/45-125	830	545	540	355	80	250	300
4.5/40-125	830	545	540	355	80	250	300
4/30-125	750	510	460	325	80	250	300
7.5/45-125	940	640	640	450	80	250	300
7/40-125	870	585	560	395	80	250	300
6/35-125	870	585	560	395	80	250	300
12.5/45-125	1100	800	750	610	80	250	300
11/40-125	1050	700	720	510	80	250	300
10/40-125	990	700	660	510	80	250	300
3/45-150	720	510	440	320	80	250	300
3/40-150	720	480	440	295	80	250	300
3.2/55-150	845	660	520	470	80	250	300
3/50-150	845	660	520	470	80	250	300

型号 Model	E1	F1	L1	B	ϕ	h2	H2
15/40-150	1130	800	760	610	80	250	300
14/40-150	1100	800	730	520	80	250	300
10/40-150	1050	710	680	520	80	250	300
5/55-150	870	660	540	470	80	250	300
4.4/50-150	845	660	520	470	80	250	300
4/45/150	845	660	520	470	80	250	300
8/55-150	990	710	640	520	80	250	300
7/50-150	920	650	620	460	80	250	300
6/45-150	860	590	540	400	80	250	300
12.5/55-150	1130	800	760	605	80	250	300
11/50-150	1070	710	720	510	80	250	300
9/50-150	1010	710	680	510	80	250	300
3.2/55-200	850	670	520	480	80	250	300
5/50-200	880	650	540	460	80	250	300
4.4/50-200	860	650	520	460	80	250	300
3.5/50-200	860	650	520	460	80	250	300
3.2/40-200	820	650	480	460	80	250	300
3.2/110-200	970	705	620	515	80	250	300
3/100-200	900	705	560	515	80	250	300
5/110-200	1100	710	760	520	80	250	300
4/100-200	1035	710	700	520	80	250	300
4/95-200	965	710	640	520	80	250	300
3.2/85-200	900	710	580	520	80	250	300
8.0/100-200	1270	800	800	610	80	250	300
7/100-200	1180	800	760	610	80	250	300
6/95-200	1120	790	760	600	80	250	300
5/85-200	1070	790	710	600	80	250	300
3.2/135-250	1020	750	700	560	80	250	300
3/130-250	1020	750	700	560	80	250	300
5/135-250	1115	720	760	530	80	250	300
4.4/130-250	1115	720	760	530	80	250	300
3.5/130-250	1065	720	680	530	80	250	300
8/150-250	1255	810	860	620	80	250	300
7/135-250	1230	810	860	620	80	250	300
6/130-250	1180	810	780	620	80	250	300
3/180-300	1140	840	800	650	90	250	300
3.2/200-300	1110	770	740	580	90	250	300
3/165-300	1060	770	680	580	90	250	300
5/165-300	1270	810	860	620	90	250	300
8/200-300				710	90	250	300
7/180-300				710	90	250	300
6/165-300				710	90	250	300
4.5/165-300	1320	900	900	710	90	250	300
3.2/200-350	1160	810	760	620	90	250	300
5/200-350	1285	810	880	620	90	250	300

以上内容仅为本文档的试下载部分，为可阅读页数的一半内容。如要下载或阅读全文，请访问：https://d.book118.com/886152112033010040