

Table of Contents

Table of Contents.....	1
Usage Notice.....	2
<i>Precautions.....</i>	<i>2</i>
Introduction.....	4
<i>Product Features.....</i>	<i>4</i>
<i>Package Overview.....</i>	<i>5</i>
<i>Product Overview.....</i>	<i>6</i>
<i>Main Unit.....</i>	<i>6</i>
<i>Panel Control.....</i>	<i>7</i>
<i>Connection Ports.....</i>	<i>7</i>
<i>Remote Control.....</i>	<i>8</i>
Installation.....	9
<i>Connecting the Projector.....</i>	<i>9</i>
<i>Powering On/Off the Projector.....</i>	<i>10</i>
<i>Powering On the Projector.....</i>	<i>10</i>
<i>Powering off the projector.....</i>	<i>11</i>
<i>Warning Indicator.....</i>	<i>11</i>
<i>Adjusting the Projected Image.....</i>	<i>12</i>
<i>Adjusting the Projector Height.....</i>	<i>12</i>
<i>Adjusting the Projector Zoom / Focus.....</i>	<i>13</i>
<i>Adjusting Projection Image Size.....</i>	<i>13</i>
User Controls	14
<i>Panel Control & Remote Control.....</i>	<i>14</i>
<i>On-Screen Display Menus.....</i>	<i>16</i>
<i>How to operate.....</i>	<i>16</i>
<i>Language.....</i>	<i>17</i>
<i>User's Info.....</i>	<i>18</i>
<i>All Images.....</i>	<i>20</i>
<i>Computer Image.....</i>	<i>22</i>
<i>Videc Image.....</i>	<i>23</i>
<i>Management.....</i>	<i>24</i>
<i>PIP.....</i>	<i>26</i>
Appendices	27
<i>Troubleshooting.....</i>	<i>27</i>
<i>Changing the lamp.....</i>	<i>30</i>
<i>Specifications.....</i>	<i>31</i>
<i>Compatibility Modes.....</i>	<i>32</i>

Usage Notice

Precautions

Follow all warnings, precautions and maintenance as recommended in this user's guide to maximize the life of your unit.

-  **Warning-** Do not look into the projector's lens when the lamp is on. The bright light may hurt your eyes.
-  **Warning-** To reduce the risk of fire or electric shock, do not expose this product to rain or moisture.
-  **Warning-** Please do not open or disassemble the product as this may cause electric shock.
-  **Warning-** When changing the lamp, please allow unit to cool down, and follow all changing instructions.
-  **Warning-** This product will detect the life of the lamp itself. Please be sure to change the lamp when it shows warning messages.
-  **Warning-** Reset the "Reset Lamp Hours" function from the On Screen Display "Management" menu after replacing the lamp module (refer to page 24).
-  **Warning-** When switching the projector off, please ensure the projector completes its cooling cycle before disconnecting power.
-  **Warning-** Turn on the projector first and then the signal sources.
-  **Warning-** When the lamp reaches the end of its life, it will burn out and may make a loud popping sound. If this happens, the projector will not turn back on until the lamp module has been replaced. To replace the lamp, follow the procedures listed under "Changing the Lamp".

Usage Notice

Do:

- ☞ Turn off the product before cleaning.
- ☞ Use a soft cloth moistened with mild detergent to clean the display housing.
- ☞ Disconnect the power plug from AC outlet if the product is not being used for a long period of time.

Don't:

- ☞ Block the slots and openings on the unit provided for ventilation.
- ☞ Use abrasive cleaners, waxes or solvents to clean the unit.
- ☞ Use under the following conditions:
 - Extremely hot, cold or humid environment.
 - In areas susceptible to excessive dust and dirt.
 - Near any appliance generating a strong magnetic field.
 - Place in direct sunlight.

Introduction

Product Features

*This product is an XGA single chip 0.7" DLP™ projector.
Outstanding features include:*

- True XGA, 1024 x 768 addressable pixels
- 2.1 lbs (1 kg) compact design
- Single chip DLP™ technology
- NTSC/NTSC4.43/PAL/PAL-M/PAL-N/SECAM and HDTV compatible
- Full function remote control
- User friendly multilingual on screen display menu
- Advanced electronic keystone correction and high quality full screen image re-scaling
- User friendly control panel
- SXGA compression and VGA, SVGA re-sizing
- 120 watt user replaceable P-VIP lamp
- Mac compatible

Introduction

Package Overview

This projector comes with all the items shown below. Check to make sure your unit is complete. Contact your dealer immediately if anything is missing.



Projector with lens cap



Power Cord



VGA Cable



S-Video Cable



Composite Video Cable



User's Guide



Carrying Case



Remote Control



Battery



Quick Start Card



Warranty Card

Introduction

Product Overview


Main Unit



1. Focus Ring
2. Zoom Ring
3. Elevator Button
4. Zoom Lens
5. Remote Control Receiver
6. Connection Ports
7. Power Connector
8. Panel Control


Introduction

Panel Control

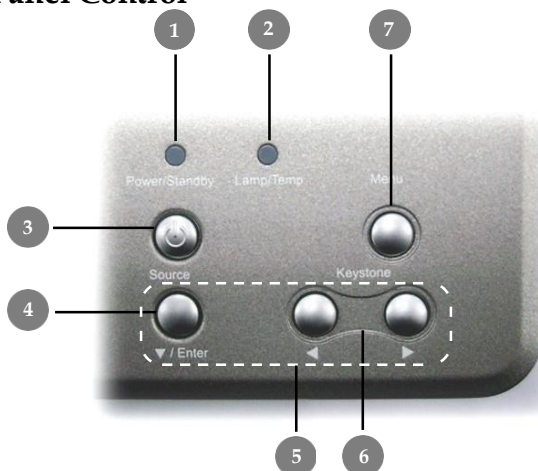

1. Power/Standby Indicator
2. Warning Indicator
3. Power
4. Source
5. Directional Select and Enter Keys
6. Keystone Correction
7. Menu (On/Off)


Connection Ports

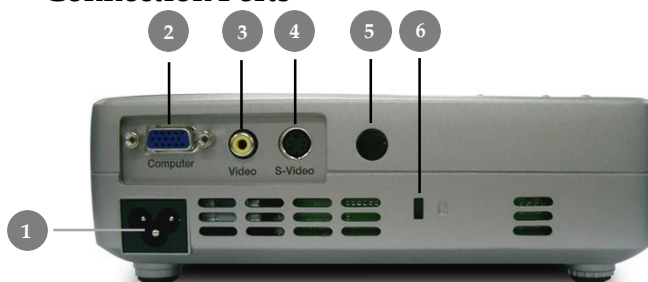

1. Power Connector
2. PC Analog Signal/HDTV/Component Video Connector
3. Composite Video Input Connector
4. S-Video Input Connector
5. Remote Control Receiver
6. Kensington™ Lock Port

Introduction

Remote Control

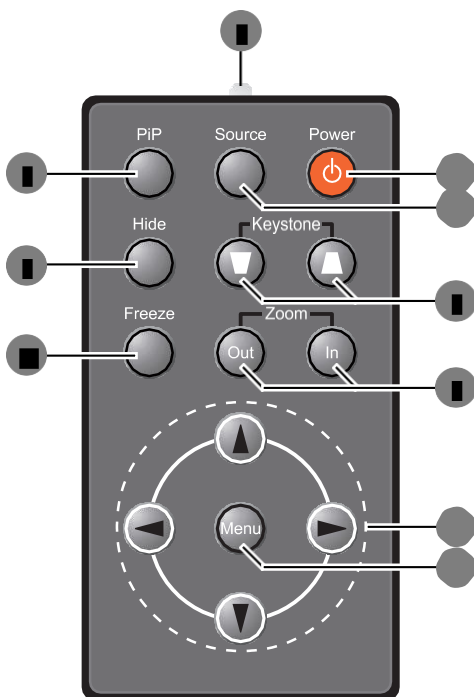

1. Transmit Indicator Light
2. Power
3. Source
4. Keystone Correction
5. Zoom In/Zoom Out
6. Four Directional Select Keys
7. Menu Key
8. Picture-In-Picture
9. Hide
10. Freeze

以上内容仅为本文档的试下载部分，为可阅读页数的一半内容。如要下载或阅读全文，请访问：<https://d.book118.com/985031210131011101>