Table of contents

1 TOPOLOGY 3

2 SCOPE OF SUPPLY – K-CHIEF 600 4

2.1 K-Chief 600 hardware 4

2.1.1 Equipment in engine control room 4

2.1.2 Equipment in wheelhouse 5

2.1.3 Equipment in C/E Cabin 6

2.1.4 Watch call and extension alarm panels 7

2.1.5 Equipment for engine room systems 8

2.1.6 Cabinets for DPU for engine room system 9

2.1.7 Valve Control system and Level Gauge 10

2.1.8 Equipment for power management 12

2.1.9 I/O summary 13

2.1.10 Engineer fitness system. 13

2.1.11 UPS 14

2.2 K-Chief 600 system functions 15

2.2.1 Basic K-Chief 600 functionality 15

2.2.2 Graphical User Interface 19

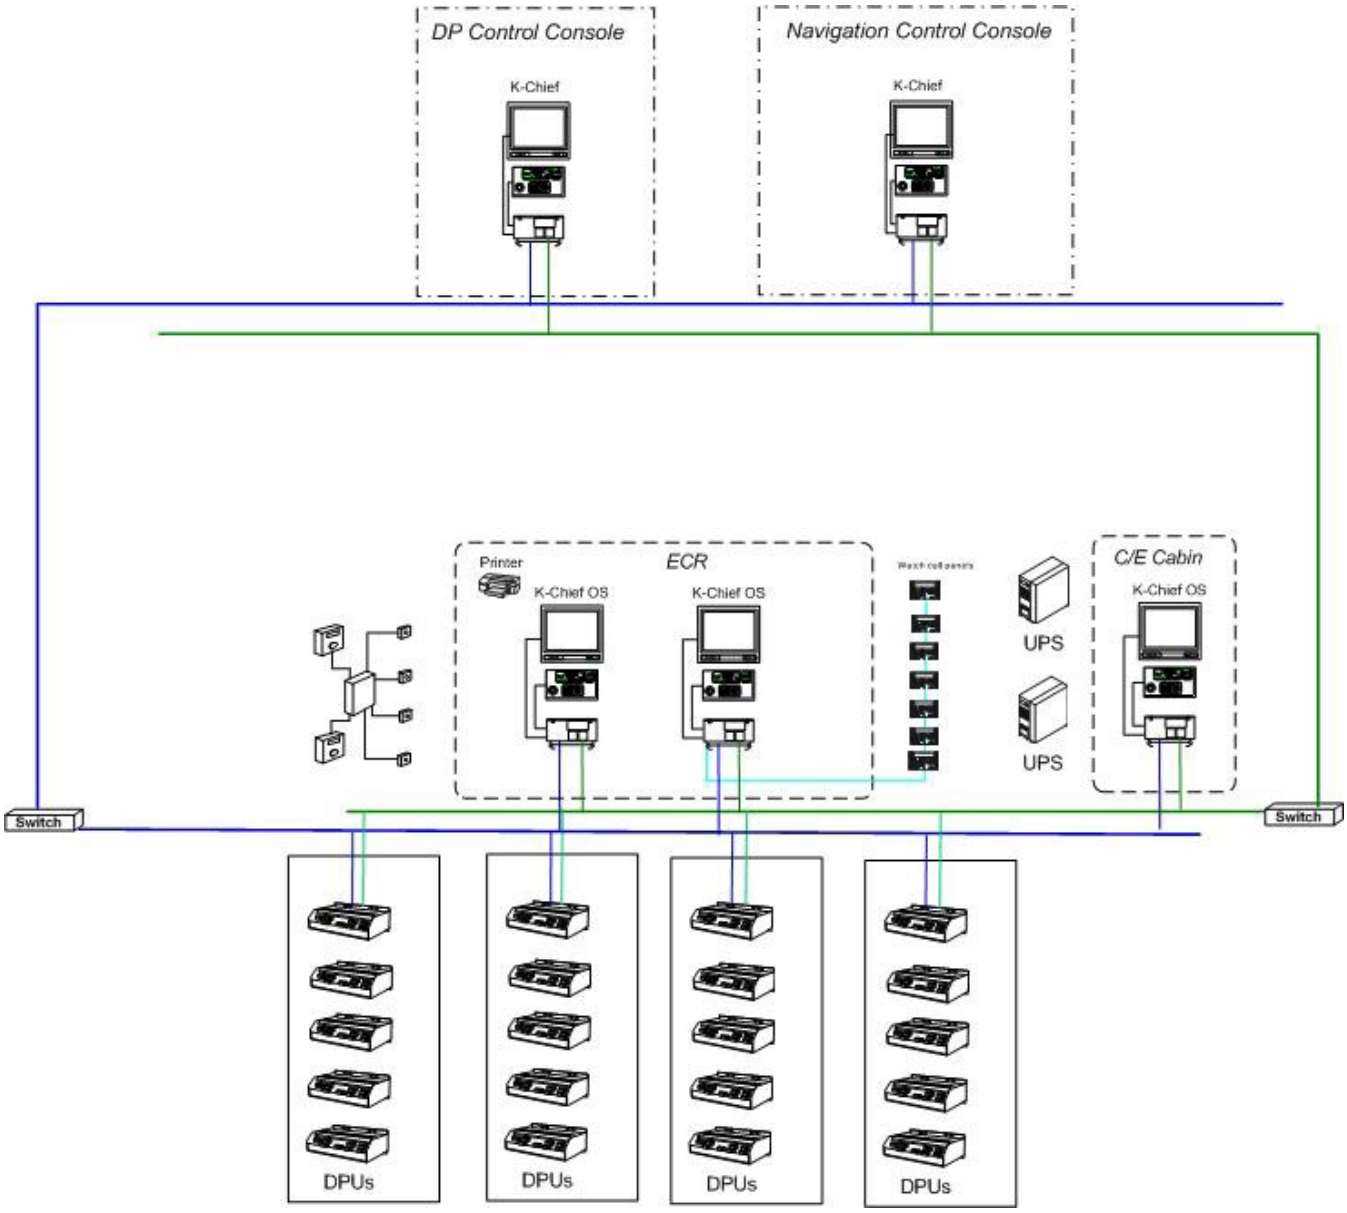
2.2.3 Auxiliary machinery management 20

2.2.4 Ballast and cargo control 20

2.2.5 Power management system functions 21

3 SCOPE OF SUPPLY – PROJECT SERVICES 23




1 TOPOLOGY


DP Control Console
K-Chief
Navigation Control Console
K-Chief
Printer
ECR
K-Chief OS
K-Chief OS
UPS
UPS
C/E Cabin
K-Chief OS
Switch
Switch
DPUs
DPUs
DPUs
DPUs



2 SCOPE OF SUPPLY – K-CHIEF 600

2.1 K-Chief 600 hardware

2.1.1 Equipment in engine control room

Two (2)		**K-Chief 600 Operator Station (Built-in)** • Type approved Windows-7™ marine computer • Colour display (22" TFT wide screen) • K-Chief Operator Panel including trackball and view selection matrix for mounting in console including: – CRP panel for command transfer and alarm acknowledge, tracker ball and function keys • Process network connections (CAN) for Watch call • Process network connection (CAN) for distributed process controllers • Administrative network connections • Input Power: 230VAC from UPS • Computer mounting kit • Type approved monitor bracket
One (1)		**Alarm & Log printer** • Color LaserJet with toner • 5m cable • Paper size A4
Two (2)		**Type Approved Network Switch** • 8xRJ45 • Alarm led status

2.1.2 Equipment in wheelhouse



Two (2)		**K-Chief 600 Operator Station** • Type approved Windows-7™ marine computer • Colour display (22" TFT wide screen) • K-Chief Operator Panel including trackball and view selection matrix for mounting in console including: – ALC panel for command transfer and alarm acknowledge, – Input panel with tracker ball and function keys • Administrative network connections • Input Power: 230VAC from UPS • Computer mounting kit • Type approved monitor bracket
One (1)		**Alarm & Log printer** • Color LaserJet with toner • 5m cable • Paper size A4
Two (2)		**Type Approved Network Switch** • 8xRJ45 • Alarm led status

2.1.3 Equipment in C/E Cabin

One (1)		**K-Chief 600 Operator Station** • Type approved Windows-7™ marine computer • Colour display (22" TFT wide screen) • Mouse and keyboard • Process network connections (CAN) for Watch call • Administrative network connections • Input Power: 230VAC from UPS • Computer mounting kit • Type approved monitor bracket

2.1.4 Watch call and extension alarm panels

Watch call and extension alarm panels with LCD display for alarms

Two (2)		**Watch Bridge Unit** Alarm Extension System for unattended machinery space notation(UMS/E0/ACCU) • Selection and indication of duty engineer • LCD for Alarm Text • 6 group alarms • Repeat alarm • Built-in Engineer Call function • Integrated cargo alarm function • Buzzer Duty selection from K-Chief 600 Operators Panel in ECR
Six (6)		**Watch Cabin Unit - Engineers cabins** • LCD for Alarm Text • 6 group alarms • Repeat alarm • Built-in Engineer Call function
One (1)		• Buzzer

以上内容仅为本文档的试下载部分，为可阅读页数的一半内容。如要下载或阅读全文，请访问：https://d.book118.com/195014022303011041